

Makita

Makita
Professional
Power Tools

MINI
CATALOGUE 2009



PROFESSIONAL POWER TOOLS

Cordless tools
 L-bit
 Drilling/Fastening
 Impact
 Drilling/Demolition
 Cutting
 Grinding/Sanding
 Sawing
 Planing/Routing
 Outdoor
 Power Equipment
 Dust
 Extraction/Cleaners
 SSP
 Series
 Pneumatic

Model KP0810K / KP0810CK

850W motor
 CB-132
 a standard
1.050W motor
 CB-132
 + KP0810K



82mm (3-1/4") Power Planer

Continuous rating Input	850W : KP0810K 1.050W : KP0810CK
Planing width	82mm (3-1/4")
Planing depth	4mm (5/32")
No load speed (rpm)	16,000 : KP0810K 12,000 : KP0810CK
Dimensions (L x W x H)	290 x 108 x 170mm (11-3/8" x 4-5/8" x 6-10/16")
Net weight	3.2kg (7.2lbs) : KP0810K 3.3kg (7.2lbs) : KP0810CK

Model 1100

750W motor
 CB-103A



82mm (3-1/4") Power Planer

Continuous rating Input	750W
Planing width	82mm (3-1/4")
Planing depth	3mm (1/8")
No load speed (rpm)	16,000
Overall length	415mm (16-3/8")
Net weight	4.9kg (10.8lbs)

Model 1600

750W motor
 CB-103A



60mm (2-1/8") Power Planer

Continuous rating Input	750W
Planing width	60mm (2-1/8")
Planing depth	3mm (1/8")
No load speed (rpm)	16,000
Overall length	375mm (14-3/4")
Net weight	5.0kg (11lbs)

Model 1804N

900W motor
 CB-153A



134mm (5-3/8") Power Planer

Continuous rating Input	900W
Planing width	136mm (5-3/8")
Planing depth	3mm (1/8")
No load speed (rpm)	16,000
Overall length	445mm (17-1/2")
Net weight	7.8kg (17.2lbs)

Model 1902

800W motor
 CB-51A



82mm (3-1/4") Power Planer

Continuous rating Input	800W
Planing width	82mm (3-1/4")
Planing depth	1mm (1/32")
No load speed (rpm)	16,000
Overall length	260mm (11-3/8")
Net weight	2.5kg (5.5lbs)

Model 1805N

1.140W motor
 CB-153A



155mm (6-1/8") Power Planer

Continuous rating Input	1.140W
Planing width	152mm (6-1/8")
Planing depth	2mm (1/16")
No load speed (rpm)	15,000
Overall length	445mm (17-1/2")
Net weight	7.6kg (17.4lbs)

Model 2012NB

1.640W motor
 CB-153A



304mm (12") Planer

Continuous rating Input	1,650W
Cutting width	304mm (12")
Cutting depth	Cutting with 0-150mm 1.3mm (1/16") Cutting with 150-240mm 1.5mm (5/16")
Feed rate/min.	0.5m (27.90")
Table size (W x L)	304 x 771mm (12" x 30-5/8")
No load speed (rpm)	0,500

Model 2107F

1.100W motor
 CB-303A



Portable Band Saw

Continuous rating Input	710W
Capacity	Round workpiece (dia.) 120mm (4-3/4") Rectangle workpiece (WxD) (std.) 100mm x 100mm (4-3/4" x 4-3/4")
Blade speed	8m (265) - 130m (500) / min
Dimensions (L x W x H)	508 x 198 x 256mm (20" x 7-3/8" x 10-1/8")
Net weight	5.7kg (12.6lbs)

Model 2414NB

2.000W motor
 CB-203A



355mm (14") Portable Cut-off

Continuous rating Input	2,000W
Wheel dia.	355mm (14")
Hole dia.	25.4mm (1")
No load speed (rpm)	3,300
Dimensions (L x W x H)	530 x 280 x 600mm (21-1/16" x 11" x 23-5/8")
Net weight	18.2kg (40.7lbs)

Model 2416S

1.430W motor
 CB-153A



405mm (16") Portable Cut-off

Continuous rating Input	1,430W
Wheel dia.	405mm (16")
Hole dia.	25.4mm (1")
No load speed (rpm)	2,300
Dimensions (L x W x H)	510 x 285 x 535mm (24" x 10-3/8" x 21")
Net weight	20kg (44lbs)

Model LC1230

1.750W motor
 CB-203A



305mm (12") Metal Cutting Saw

Continuous rating Input	1,750W
Capacity	at 90 degrees : 118mm (4-1/2") at 60 degrees : 75 x 150mm (2-1/2" x 6-1/8") at 45 degrees : 90mm (3-1/2") at 30 degrees : 45 x 60mm (1-3/4" x 2-1/4")
No load speed (rpm)	1,300
Dimensions (L x W x H)	516 x 306 x 633mm (20-1/4" x 12" x 25-3/4")

Model 4131

1.100W motor
 CB-303A



185mm (7-1/4") Metal Cutter

Continuous rating Input	1,100W
Blade diameter	185mm (7-1/4")
Capacity	Max. cutting : 63mm (2-1/2")
No load speed (rpm)	3,300
Overall length	350mm (14-1/8")
Net weight	4.8kg (10.6lbs)

Model SG1250

1.400W motor
 CB-51B
 AUTO-CUT



125mm (5") Wall Chaser

Continuous rating Input	1,400W
Capacity	Depth : 0-30mm Width : 6-30mm
Blade diameter	125mm (5")
No load speed (rpm)	9,000
Overall length	346mm (13-5/8")
Net weight	4.1kg (9.0lbs)

Model 2702 / 2703

1.600W motor
 CB-103A



210mm (8-1/4") / 255mm (10") Table Saw

Continuous rating Input	1,600W
Capacity	at 90 degrees : 65mm (2-11/16") : 2702 91mm (3-9/16") : 2703 at 45 degrees : 47mm (1-3/4") : 2702 63mm (2-1/2") : 2703
Blade diameter	210mm (8-1/4") : 2702 255mm (10") : 2703
No load speed (rpm)	4,800

Model MLT100 / MLT100S

1.500W motor



255mm (10") Table Saw

Continuous rating Input	1,500W
Capacity	at 90 degrees : 91mm (3-1/2") at 45 degrees : 63mm (2-1/2")
Blade diameter	255mm (10")
No load speed (rpm)	4,000
Dimensions (L x W x H)	660 x 960 x 350mm (26" x 37-3/4" x 13")
Net weight	38kg (83lbs)

Model 3600H

1.800W motor
 CB-103A



12mm (1/2") Router

Continuous rating Input	1,800W
Capacity	Collet : 12mm or 1/2"
Base dia.	100mm (4-1/8")
No load speed (rpm)	24,000
Overall height	210mm (8-1/4")
Net weight	4.3kg (9.5lbs)

Model 3612

1,650W motor
CB-303A



12mm (1/2") Electronic Router (Plunge type)

Continuous rating input	1,650W
Capacity	Collet: 12mm or 1/2"
Plunge capacity	0 - 60mm (0 - 2-3/8")
Base dia.	90mm (3-1/4")
No load speed (rpm)	22,000
Overall height	297mm (11-11/16")
Net weight	5.8kg (12.8lb)

Model 3612BR

1,650W motor
CB-155A



12mm (1/2") Router (Plunge type)

Continuous rating input	1,650W
Capacity	Collet: 12mm or 1/2"
Plunge capacity	0 - 65mm (0 - 2-9/16")
Base dia.	100mm (3-1/4")
No load speed (rpm)	23,000
Overall height	297mm (11-11/16")
Net weight	5.7kg (12.5lb)

Model 3612C

1,850W motor
CB-200A




12mm (1/2") Electronic Router (Plunge type)

Continuous rating input	1,850W
Capacity	Collet: 12mm or 1/2"
Plunge capacity	0 - 60mm (0 - 2-3/8")
Base dia.	100mm (3-1/4")
No load speed (rpm)	3,000-23,000
Overall height	297mm (11-11/16")
Net weight	6.0kg (13.2lb)

Model RP1800 / RP1800F

1,650W motor



12mm (1/2") Plunge Router

Continuous rating input	1,650W
Capacity	Collet: 12mm (1/2")
Plunge Capacity	70mm (2-3/4")
No load speed (rpm)	22,000
Net Weight	5.8kg (12.8lb)

Model RP1801 / RP1801F

1,650W motor



12mm (1/2") Plunge Router

Continuous rating input	1,650W
Capacity	Collet: 12mm (1/2")
Plunge Capacity	70mm (2-3/4")
No load speed (rpm)	22,000
Net Weight	5.8kg (12.8lb)

Model RP2300FC / RP2301FC

2,300W motor
+RP2300
2,100W motor
+RP2301FC



12mm (1/2") Plunge Router

Continuous rating input	2,300W - RP2300FC 2,100W - RP2301FC
Capacity	Collet: 12mm (1/2")
Plunge Capacity	70mm (2-3/4")
No load speed (rpm)	3,000-22,000
Net Weight	6.0kg (13.2lb)

Model 3709

800W motor
CB-411A



6mm (1/4") Trimmer

Continuous rating input	800W
Capacity	Collet: 6mm or 1/4"
No load speed (rpm)	31,000
Dimensions (L x W x H)	82 x 90 x 199mm (3-1/4" x 3-1/2" x 7-7/8")
Net weight	1.9kg (3.2lb)

Model N3701

440W motor
CB-51A



6mm (1/4") Trimmer

Continuous rating input	440W
Capacity	Collet: 6mm or 1/4"
Base	82 x 90mm (3-1/4" x 3-1/2")
No load speed (rpm)	32,000
Overall height	181mm (7-1/8")
Net weight	1.7kg (3.7lb)

Model 407

1,650W motor
CB-185



Vacuum Cleaner (Wet&Dry)

Continuous rating input	1,650W
Max. peak air flow	3.6m³/min
Max. sealed suction (water column)	20.6kpa (2,100mmH ₂ O)
Recoverable capacity	Dust: 32L (8.4gal) Water: 30L (7.8gal)
Overall height	859mm (27-1/2")
Net weight	16.3kg (32.7lb)

Model 4076DW

7.2V



Cordless Cleaner

Capacity	100ml
Max. air flow	0.5m³/min
Continuous use (minutes) H/L	10, L0: 25
Max. sealed suction (water column)	2.7kpa (270mmH ₂ O)
Overall length	445mm (17-1/2")
Net weight	1.4kg (3.1lb)
Voltage	7.2V

Model 4014N / 4014NV

600W motor
CB-100A



Blower

Continuous rating input	600W
Air pressure (water column)	0-600mm (22")
Air volume	28m³/min (98cu.ft./min)
No load speed (rpm)	16,000: 4014N 0-16,000: 4014NV
Overall length	430mm (16-15/16")
Net weight	1.75kg (3.8lb)

Model UB1100 / UB1101

600W motor
CB-303A



Blower

Continuous rating input	600W
Air volume	2.6m³/min: UB1100 0.28m³/min: UB1101
Air pressure	5.5kpa (560mm H ₂ O): UB1100 0.55kpa (56mm H ₂ O): UB1101
No load speed (rpm)	16,000: UB1100 0-16,000: UB1101
Overall length	480mm (18-7/8")
Net weight	1.7kg (3.7lb)

Model 4100NB / 4100NH

880W motor
CB-351A
+4100NB
1,300W motor
CB-300A
+4100NH



110mm (4-3/8") Cutter

Continuous rating input	880W: 4100NB 1,300W: 4100NH
Capacity Max. cutting	34mm (1-5/16")
Blade diameter	110mm (4-3/8")
No load speed (rpm)	11,000: 4100NB 13,000: 4100NH
Overall length	218mm (8-5/8"): 4100NB 234mm (9-1/4"): 4100NH
Net weight	2.7kg (5.9lb): 4100NB 2.9kg (6.4lb): 4100NH

Model 4140

1,050W motor
CB-303A



110mm (4-3/8") Cutter

Continuous rating input	1,050W
Capacity	at 90 degree: 34mm (1-3/8") at 45 degree: 21mm (11/16")
Blade diameter	110mm (4-3/8")
No load speed (rpm)	11,000
Overall length	222mm (8-3/4")
Net weight	2.7kg (6.0lb)

Model 4191DWA

12V



80mm (3-1/8") Cordless Cutter

Capacity	at 90 degree at 45 degree: 16mm (5/8")
Wheel diameter	60mm (2-1/4")
No load speed (rpm)	1,000
Overall length	318mm (12-1/2")
Net weight	2.1kg (4.6lb)
Voltage	12V

Model 4107R

1,400W motor
CB-130A



180mm (7-1/8") Cutter

Continuous rating input	1,400W
Capacity	Max. cutting: 60mm (2-3/8")
Blade diameter	180mm (7-1/8")
No load speed (rpm)	5,000
Overall length	375mm (14-9/16")
Net weight	7.2kg (15.8lb)

Cordless tools
 L-ion
 Drilling/Driving
 Impact
 Drilling/Drumming
 Cutting
 Grinding/Sanding
 Sawing
 Planing/Routers
 Outdoor
 Power Equipment
 Dust
 Extraction/Other
 SPP Series
 Pneumatic

Cordless Tools
 Drilling/Driving
 Impact/Drum
 Cutting
 Grinding/Sanding
 Sawing
 Planing/Router
 Outdoor Power Equipment
 SSB Series
 Pneumatic

Model 4300BA / 4300BV

300W motor
CB-61A

Jig Saw

Continuous rating input 300W
Capacity
In wood at 90 degrees : 55mm (2-1/8")
In steel at 90 degrees : 6mm (1/4")

Length of stroke 26mm (1")
Strokes per minute (rpm) 0-3100 (4300BA) / 0-3100 (4300BV)
Overall length 255mm (10-1/8") : 4300BA
225mm (8-7/8") : 4300BV
Net weight 2.5kg (5.5lbs)

Model 4327 / 4329

450W motor
CB-64A

Jig Saw

Continuous rating input 450W
Capacity
In wood at 90 degrees : 60mm (2-3/8")
In steel at 90 degrees : 6mm (1/4")

Length of stroke 30mm (1-1/8")
Strokes per minute (rpm) 500 - 3,100
Dimensions 224 x 77 x 150mm
(L x W x H) 8-7/8" x 3" x 7-3/4"
Net weight 1.9kg (4.2lbs)

Model 4350T / 4350CT

800W motor
CB-619A
+ 1300
720W motor
CB-619A
+ 4100CT

Jig Saw

Continuous rating input 800W : 4350T / 720W : 4350CT
Capacity
In wood at 90 degrees : 135mm (5-3/16")
In steel at 90 degrees : 10mm (3/8")

Length of stroke 28mm (1")
Strokes per minute (rpm) 200-4300 / 80-3300 (4350CT)
Dimensions 238 x 73 x 207mm
(L x W x H) 9-1/4" x 2-7/8" x 8-1/8"
Net weight 2.5kg (5.5lbs)

Model 5007NF

1,800W motor
CB-103A

185mm (7-1/4") Circular Saw

Continuous rating input 1,800W
Capacity
at 90 degrees : 63.5mm (2-1/2")
at 45 degrees : 45mm (1-7/8")
at 10 degrees : 30mm (1-3/8")

Blade diameter 185mm (7-1/4")
No load speed (rpm) 5,000
Dimensions 317 x 240 x 280mm
(L x W x H) 12-1/2" x 9-1/2" x 10-3/8"
Net weight 5.0kg (11lbs)

Model 5008MG

1,800W motor
CB-103A

210mm (8-1/4") Circular Saw

Continuous rating input 1,800W
Capacity
at 90 degrees : 75.5mm (3")
at 45 degrees : 57mm (2-1/4")
at 10 degrees : 43mm (1-11/16")

Blade diameter 210mm (8-1/4")
No load speed (rpm) 5,200
Overall length 320mm (12-1/2")
Net weight 4.8kg (10.6lbs)

Model 5600NB / 5800NB

800W motor
CB-302A
+ 5000B
800W motor
CB-303A
+ 5800B

160mm (6-1/4") / 180mm (7-1/8") Circular Saw

Continuous rating input 800W : 5600NB / 900W : 5800NB
Capacity
at 90 degrees : 55mm (2-1/8") : 5600NB
64mm (2-1/2") : 5800NB
at 45 degrees : 38mm (1-5/8") : 5600NB
43mm (1-11/16") : 5800NB

Blade diameter 160mm (6-1/4") : 5600NB
180mm (7-1/8") : 5800NB
No load speed (rpm) 4,000 : 5600NB / 4,500 : 5800NB
Overall length 285mm (11-1/8") : 5600NB / 270mm (10-5/8") : 5800NB
Net weight 3.0kg (6.6lb) : 5600NB / 3.0kg (6.6lb) : 5800NB

Model 5606B / 5806B-C

800W motor
CB-303A
+ 5606B
1,000W motor
CB-303A
+ 5806B-C

160mm (6-1/4") / 180mm (7-1/8") Circular Saw

Continuous rating input 800W : 5606B / 1,000W : 5806B-C
Capacity
at 90 degrees : 55mm (2-1/8") : 5606B
66mm (2-5/8") : 5806B-C
at 45 degrees : 38mm (1-5/8") : 5606B
44mm (1-11/16") : 5806B-C

Blade diameter 160mm (6-1/4") : 5606B
180mm (7-1/8") : 5806B-C
No load speed (rpm) 4,700
Overall length 285mm (11-1/8") : 5606B / 265mm (10-5/8") : 5806B-C
Net weight 3.1kg (6.8lb) : 5606B / 3.1kg (6.8lb) : 5806B-C

Model N5900B

2,000W motor
CB-103A

235mm (9-1/4") Circular Saw

Continuous rating input 2,000W
Capacity
at 90 degrees : 80mm (3-1/8")
at 45 degrees : 60mm (2-3/8")
at 10 degrees : 50mm (2-1/8")

Blade diameter 235mm (9-1/4")
No load speed (rpm) 4,100
Overall length 380mm (15")
Net weight 7.0kg (15.4lbs)

Model 5201N

1,400W motor
CB-103A

260mm (10-1/4") Circular Saw

Continuous rating input 1,400W
Capacity
at 90 degrees : 97mm (3-3/4")
at 45 degrees : 64mm (2-1/2")

Blade diameter 260mm (10-1/4")
No load speed (rpm) 3,700
Overall length 445mm (17-1/2")
Net weight 8.3kg (18.3lbs)

Model 5103N

1,700W motor
CB-103A

335mm (13-1/8") Circular Saw

Continuous rating input 1,700W
Capacity
at 90 degrees : 126mm (5")
at 45 degrees : 91mm (3-5/8")

Blade diameter 335mm (13-1/8")
No load speed (rpm) 2,900
Overall length 605mm (23-7/8")
Net weight 10kg (22lbs)

Model 5402

1,700W motor
CB-103A

415mm (16-5/16") Circular Saw

Continuous rating input 1,700W
Capacity
at 90 degrees : 157mm (6-1/8")
at 45 degrees : 106mm (4-1/8")
415mm (16-5/16")

Blade diameter 415mm (16-5/16")
No load speed (rpm) 2,250
Overall length 610mm (24-1/4")
Net weight 14kg (30.8lbs)

Model LS1040

1,600W motor
CB-103A

255mm (10") Compound Miter Saw

Continuous rating input 1,600W
Capacity
at 90 degrees : 80 x 16mm (3-1/8" x 5/8")
at 45 degrees : 80 x 67mm (3-1/8" x 2-5/8")
at 10 degrees : 255 x 380mm (10" x 15-1/4")

Blade diameter 255mm (10")
No load speed (rpm) 4,000
Dimensions 530 x 532 x 476mm
(L x W x H) 20-7/8" x 21" x 18-3/8"
Net weight 11.0kg (24.2lbs)

Model LS1440

1,300W motor
CB-103A

355mm (14") Miter Saw

Continuous rating input 1,300W
Capacity
at 90 degrees : 132 x 100mm (5-1/8" x 4")
at 45 degrees : 175 x 122mm (6-1/2" x 4-7/8")

Blade diameter 355mm (14")
No load speed (rpm) 3,200
Dimensions 590 x 530 x 400mm
(L x W x H) 23-1/2" x 20-7/8" x 15-7/8"
Net weight 5.4kg (11.8lbs)

Model LS1212

1,600W motor
CB-103A

305mm (12") Slide Compound Miter Saw

Continuous rating input 1,600W
Capacity
at 90 degrees : 95 x 305mm (3-3/8" x 12-1/4")
at 45 degrees : 98 x 225mm (3-7/8" x 8-7/8")

Blade diameter 305mm (12")
No load speed (rpm) 3,200
Dimensions 630 x 530 x 400mm
(L x W x H) 24-7/8" x 20-7/8" x 15-7/8"
Net weight 7.7kg (17.0lbs)

Model B04510 / B04540

180W motor
CB-69A
+ 100HE
100W motor
CB-69A
+ 500C

Finishing Sander

Continuous rating input 180W : B04510 / 160W : B04540
Pad size 130 x 100mm
(5-1/8" x 4")
Abrasive paper size 154 x 140mm
(6-1/8" x 5-1/2")

Orbits per minute (opm) 12,000 : B04510 / 14,000 : B04540
Overall length 190mm (7-1/2")
Net weight 1.9kg (4.2lb) : B04510
0.9kg (1.9lb) : B04540

Model B04555 / B04556 / B04557

300W motor
CB-415A
+ 5000/5000S
180W motor
CB-419A
+ 8000S

Finishing Sander

Continuous rating input 300W / 180W : B04557
Pad size 112 x 100mm (4-3/8" x 4")
Abrasive paper size 134 x 140mm (5-1/8" x 5-1/2")
Dimensions 131 x 112 x 141mm
(L x W x H) 5-1/8" x 4-3/8" x 5-5/8" : B04557
131 x 112 x 137mm
(L x W x H) 5-1/8" x 4-3/8" x 5-3/8" : B04555
Net weight 1.9kg (4.2lb) : B04551 / B04556
0.9kg (1.9lb) : B04557

Model BO4565

300W motor
CB-410A

Finishing Sander

Continuous rating input 300W
 Pad size 112 x 190mm (4-3/8" x 7-1/2")
 Abrasive paper size 114 x 102mm (4-1/2" x 4")
 Triangle 96mm (3-3/4")
 Orbits per minute (opm) 14,000
 Dimensions (L x W x H) 215 x 112 x 133mm
 (8-5/8" x 4-3/8" x 5-1/2")
 Net weight 1.1kg (2.4lb)

Model BO3700

180W motor
CB-81A

Finishing Sander

Continuous rating input 180W
 Pad size 90 x 185mm
 (3-5/8" x 7-1/4")
 Abrasive paper size 90 x 228mm
 (3-5/8" x 9")
 Orbits per minute (opm) 10,000
 Overall length 254mm (10")
 Net weight 1.4kg (3.1lb)

Model BO4901

330W motor
CB-410A

Finishing Sander

Continuous rating input 330W
 Pad size 115 x 228mm
 (4-1/2" x 9")
 Abrasive paper size 115 x 280mm
 (4-1/2" x 11")
 Orbits per minute (opm) 10,000
 Overall length 289mm (11-3/8")
 Net weight 2.8kg (6.2lb)

Model 9045B

800W motor
CB-100A

Finishing Sander

Continuous rating input 800W
 Pad size 114 x 224mm
 (4-1/2" x 8-1/4")
 Abrasive paper size 114 x 260mm
 (4-1/2" x 11")
 Orbits per minute (opm) 10,000
 Overall length 240mm (9-1/2")
 Net weight 2.6kg (5.7lb)

Model 9045N

800W motor
CB-100A

Finishing Sander

Continuous rating input 800W
 Pad size 114 x 224mm
 (4-1/2" x 8-1/4")
 Abrasive paper size 114 x 260mm
 (4-1/2" x 11")
 Orbits per minute (opm) 10,000
 Overall length 268mm (10-5/8")
 Net weight 2.8kg (6.2lb)

Model 9910

800W motor
CB-411A

76mm x 457mm (3" x 18") Belt Sander

Continuous rating input 800W
 Belt size 76 x 457mm (3" x 18")
 Belt speed 270m/min. (900ft/min)
 Overall length 260mm (10-3/16")
 Net weight 2.8kg (6.2lb)
 Power supply cord 2.5m (8.2ft)

Model 9031

850W motor
CB-411A

30mm x 533mm (1-3/16" x 21") Belt Sander

Continuous rating input 850W
 Belt size 30 x 533mm
 (1-3/16" x 21")
 Belt speed 300-1,000m/min.
 (950-3,200ft/min)
 Overall length 380mm (15")
 Net weight 2.1kg (4.6lb)

Model 9401

940W motor
CB-103A

100mm x 610mm (4" x 24") Belt Sander

Continuous rating input 940W
 Belt size 100 x 610mm
 (4" x 24")
 Belt speed 260m/min. (1,150ft/min)
 Overall length 274mm (10.8")
 Net weight 7.5kg (16.5lb)

Model 9402

1,040W motor
CB-103A

100mm x 610mm (4" x 24") Belt Sander

Continuous rating input 1,040W
 Belt size 100 x 610mm
 (4" x 24")
 Belt speed 26 : 350m (1,150ft/min)
 1α : 300m (984ft/min)
 Overall length 374mm (14-3/4")
 Net weight 7.5kg (16.5lb)

Model 9403

1,200W motor
CB-903A

100mm x 610mm (4" x 24") Belt Sander

Continuous rating input 1,200W
 Belt size 100 x 610mm
 (4" x 24")
 Belt speed 500m/min. (1,640ft/min)
 Overall length 352mm (13-7/8")
 Net weight 5.0kg (11.0lb)

Model 9924DB

850W motor
CB-100A

76mm x 610mm (3" x 24") Belt Sander

Continuous rating input 850W
 Belt size 76 x 610, 620mm
 (3" x 24, 24-3/8")
 Belt speed 400m/min. (1,300ft/min)
 300m (14")
 Overall length 4.8kg (10.6lb)

Model 903

100W motor
CS-1

3mm (1/8") Mini Grinder

Continuous rating input 100W
 Capacity Culet : 3mm or 1/8"
 No load speed (rpm) 30,000
 Overall length 193.5mm (7-3/4")
 Net weight 0.6kg (1.3lb)

Model 906

340W motor
CB-61A

6mm (1/4") Die Grinder

Continuous rating input 340W
 Capacity Culet : 6mm or 1/4"
 No load speed (rpm) 25,000
 Overall length 283mm (11-1/8")
 Net weight 0.8kg (1.8lb)

Model 906H

330W motor
CB-65A

6mm (1/4") Die Grinder

Continuous rating input 330W
 Capacity Culet : 6mm or 1/4"
 No load speed (rpm) 27,000
 Overall length 325mm (14")
 Net weight 1.9kg (4.2lb)

Model GD0600 / GD0601

400W motor
CB-320

6mm (1/4") Die Grinder

Continuous rating input 400W
 Capacity Culet : 6mm or 1/4"
 Wheel dia. 38mm (1-1/2")
 No load speed (rpm) 25,000
 Dimensions 368 x 82 x 83mm
 (14-1/8" x 3-1/4" x 3-1/4")
 Net weight 1.8kg (3.9lb)

Model GD0800 / GD0800C

800W motor
CB-325 + CD0801
 750W motor
CB-316
 AUTO-CLUT
 + CD0802

8mm (1/4") Die Grinder

Continuous rating input 800W : GD0801
 750W : GD0800C
 Capacity Culet : 8mm (1/4") : GD0801
 Culet : 8.5mm (1/4") : GD0800C
 No load speed (rpm) 30,000 : GD0801
 7,000-28,000 : GD0800C
 Overall length 271mm (10.67") : GD0801
 271mm (10.67") : GD0800C
 Net weight 1.8kg (3.9lb)

Cordless Tools
 Li-Ion
 Drilling/ Fastening
 Impact
 Drilling/ Demolition
 Cutting
 Grinding/ Sanding
 Sawing
 Flaming/ Polishing
 Outdoor Power Equipment
 Dust Extractors/Collectors
 SGP Series
 Pneumatic

Model GD0810C



750W motor
CB-918
AUTO-CUT

8mm (1/4") Die Grinder

Continuous rating input 750W
 Capacity Collar: 8, 6mm or 1/4"
 No load speed (rpm) 1,800-7,000
 Overall length 371mm (14-5/8")
 Net weight 1.7kg (3.7lbs)

Model 9105



750W motor
CB-153A

125mm (5") Straight Grinder

Continuous rating input 750W
 Max. wheel size 125 x 19mm (5" x 3/4")
 Hole dia. 12.7mm (1/2")
 No load speed (rpm) 4,800
 Overall length 100mm (21-5/8")
 Net weight 1.6kg (3.5lbs)

Model GB502 / GB602W



250W motor

Bench Grinder

Continuous rating input 250W
 Max. wheel size 150 x 19mm (6" x 5/8")
 Hole dia. : GB802 : 12.7mm (1/2")
 : GB602W : 19 x 18, 8.4mm (3/4" x 5/8, 1/4")
 Overall length : GB602W : 100mm (21-5/8")
 Hole dia. 12.7mm (1/2")
 H.P. 1/3
 No load speed (rpm) 2,850 (50Hz) / 3,450 (60Hz)
 Net weight 9.4kg (20.7lbs) : GB902 : 9.5kg (20.9lbs) : GB602W

Model G8801



550W motor

205mm (8") Bench Grinder

Continuous rating input 550W
 Max. wheel size 205 x 19mm (8" x 3/4")
 Hole dia. 15.88mm (5/8")
 H.P. 3/4
 No load speed (rpm) 2,850 (50Hz) / 3,450 (60Hz)
 Dimensions 395 x 265 x 330mm
 (L x W x H) (15-9/16" x 10-7/16" x 13-1/8")
 Net weight 20.5kg (45.1lbs)

Model GV6010



440W motor
CB-64A

150mm (6") Disc Sander

Continuous rating input 440W
 Capacity Abrasive disc : 150mm (6")
 Pad : 120mm (4-3/4")
 No load speed (rpm) 4,500
 Dimensions 200 x 74 x 181mm
 (L x W x H) (7-7/8" x 2-15/16" x 7-1/8")
 Net weight 1.1kg (2.4lbs)

Model 9218SB



570W motor
CB-100A

180mm (7") Disc Sander

Continuous rating input 570W
 Capacity Wire cup brush : 110mm (4-3/8")
 Abrasive disc : 180mm (7")
 No load speed (rpm) 4,500
 Overall length 225mm (8-7/8")
 Net weight 2.7kg (6.0lbs)

Model 9218PB / 9218PBL



570W motor
CB-100A

180mm (7") Polisher

Continuous rating input 570W
 Capacity Wool bonnet : 180mm (7")
 No load speed (rpm) 2,000 : 9218PB : 1,400 : 9218PBL
 Overall length 235mm (9-1/4")
 Net weight 2.9kg (6.4lbs)

Model 9207SPB



700W motor
CB-100A

180mm (7") Sander Polisher

Continuous rating input 700W
 Capacity Abrasive disc : 150mm (6")
 Diamond wheel : 180mm (7")
 No load speed (rpm) 2,000 / 3,800
 Overall length 455mm (17-7/8")
 Net weight 3.4kg (7.5lbs)

Model 9227C



1,200W motor
CB-300A

180mm (7") Sander Polisher

Continuous rating input 1,200W
 Capacity Abrasive disc : 180mm (7")
 Wool pad : 180mm (7")
 No load speed (rpm) 0 - 3,000
 Overall length 470mm (18-1/2")
 Net weight 3.0kg (6.6lbs)

Model 6904VH



360W motor
CB-415A

12.7mm (1/2") Impact Wrench

Continuous rating input 360W
 Capacity Standard bolt : M10 - M16 (3/8" - 5/8")
 High tensile bolt : M10 - M12 (3/8" - 1/2")
 Square drive : 12.7mm (1/2")
 Impacts per minute (ipm) Hi : 0-3,000 / Lo : 0-2,500
 No load speed (rpm) Hi : 0-2,400 / Lo : 0-2,100
 Max. fastening torque Hi : 160Nm (118ft-lbs)
 Lo : 147Nm (109ft-lbs)
 Overall length 265mm (10-3/8")

Model 6905B



440W motor
CB-50A

12.7mm (1/2") Impact Wrench

Continuous rating input 440W
 Capacity Standard bolt : M12 - M20 (1/2" - 3/4")
 High tensile bolt : M12 - M16 (1/2" - 5/8")
 Square drive : 12.7mm (1/2")
 Impacts per minute (ipm) 2,000
 No load speed (rpm) 1,700
 Max. fastening torque 294Nm (216ft-lbs)
 Overall length 270mm (10-5/8")

Model 6905H



470W motor
CB-415A

12.7mm (1/2") Impact Wrench

Continuous rating input 470W
 Capacity Standard bolt : M12 - M20 (1/2" - 3/4")
 High tensile bolt : M12 - M16 (1/2" - 5/8")
 Square drive : 12.7mm (1/2")
 Impacts per minute (ipm) 2,000
 No load speed (rpm) 2,200
 Max. fastening torque 294Nm (216ft-lbs)
 Overall length 275mm (10-7/8")

Model 6906



650W motor
CB-100A

19mm (3/4") Impact Wrench

Continuous rating input 650W
 Capacity Standard bolt : M16 - M22 (5/8" - 7/8")
 High tensile bolt : M16 - M20 (5/8" - 3/4")
 Square drive : 19mm (3/4")
 Impacts per minute (ipm) 1,600
 No load speed (rpm) 1,700
 Max. fastening torque 589Nm (431ft-lbs)
 Overall length 327mm (12-7/8")

Model TW0200 / TW0350



360W motor + TW0200
400W motor + TW0350
CB-411A

12.7mm (1/2") Impact Wrench

Continuous rating input 360W / 400W
 Capacity Standard bolt : M10 - M16 (3/8" - 5/8") : TW0200
 High tensile bolt : M10 - M12 (3/8" - 1/2") : TW0200
 Square drive : 12.7mm (1/2") : TW0200
 Standard bolt : M12 - M22 (1/2" - 3/4") : TW0350
 High tensile bolt : M12 - M16 (1/2" - 5/8") : TW0350
 Square drive : 12.7mm (1/2") : TW0350
 Impacts per minute (ipm) 8-2,000 : TW0200 / 2,000 : TW0350
 No load speed (rpm) 8-2,200 : TW0200 / 2,000 : TW0350
 Max. fastening torque 106Nm (78ft-lbs) / 106Nm (78ft-lbs)

Model TW1000



1,200W motor
CB-153A

25.4mm (1") Impact Wrench

Continuous rating input 1,200W
 Capacity Standard bolt : M24 - M30 (1 1/8" - 1 3/8")
 High tensile bolt : M20 - M24 (7/8" - 1 5/16")
 Square drive : 25.4mm (1")
 Impacts per minute (ipm) 1,500
 No load speed (rpm) 1,400
 Max. fastening torque 1,000Nm (738ft-lbs)
 Overall length 380mm (15")
 Net weight 8.4kg (18.5lbs)

Model 9500NB



570W motor
CB-415A

100mm (4") Angle Grinder

Continuous rating input 570W
 Capacity Depressed center wheel : 100mm (4")
 Wire cup brush : 75mm (3")
 Abrasive disc : 100mm (4")
 Diamond wheel : 110mm (4-3/8")
 No load speed (rpm) 12,000
 Overall length 253mm (10")
 Net weight 1.5kg (3.3lbs)

Model 9553B / 9553BX

710W motor
CB-325



100mm (4") Angle Grinder

Continuous rating Input 710W
Capacity Depressed center wheel : 100mm (4")
Wire cup brush : 75mm (3")
Abrasive disc : 100mm (4")
Diamond wheel : 100mm (4")
No load speed (rpm) 11,000
Dimensions 263 x 118 x 97mm
(L x W x H) (10-3/8" x 4-5/8" x 3-13/16")
Net weight 1.4kg (3.1lbs)

Model 9556NB / 9556HN

840W motor
CB-325



100mm (4") Angle Grinder

Continuous rating Input 840W
Capacity Depressed center wheel : 100mm (4")
Wire cup brush : 75mm (3")
Abrasive disc : 100mm (4")
Diamond wheel : 100mm (4")
No load speed (rpm) 11,000
Dimensions 271 x 118 x 97mm
(L x W x H) (10-5/8" x 4-5/8" x 3-13/16")
Net weight 1.6kg (3.5lbs)

Model 9556HP

840W motor
CB-325



100mm (4") Angle Grinder

Continuous rating Input 840W
Capacity Depressed center wheel : 100mm (4")
Wire cup brush : 75mm (3")
Abrasive disc : 100mm (4")
Diamond wheel : 100mm (4")
No load speed (rpm) 11,000
Dimensions 273 x 118 x 97mm
(L x W x H) (10-3/4" x 4-5/8" x 3-13/16")
Net weight 1.6kg (3.5lbs)

Model 9533B / 9533BL

720W motor
CB-411A



100mm (4") Angle Grinder

Continuous rating Input 720W
Capacity Depressed center wheel : 100mm (4")
Wire cup brush : 75mm (3")
Abrasive disc : 100mm (4")
Diamond wheel : 100mm (4-3/8")
No load speed (rpm) 12,000 : 9533B / 9,000 : 9533BL
Dimensions 262 x 118 x 104mm
(L x W x H) (10-3/8" x 4-5/8" x 4-1/8")
Net weight 1.4kg (3.1lbs)

Model 9533 / 9533L

720W motor
CB-411A



100mm (4") Angle Grinder

Continuous rating Input 720W
Capacity Depressed center wheel : 100mm (4")
Wire cup brush : 75mm (3")
Abrasive disc : 100mm (4")
Diamond wheel : 100mm (4-3/8")
No load speed (rpm) 12,000 : 9533 / 9,000 : 9533L
Dimensions 262 x 118 x 104mm
(L x W x H) (10-3/8" x 4-5/8" x 4-1/8")
Net weight 1.4kg (3.1lbs)

Model 9005N / 9006N

1,020W motor
CB-100A



125mm (5") / 150mm (6") Angle Grinder

Continuous rating Input 1,020W
Capacity Depressed center wheel : 125mm (5") / 150mm (6")
Wire cup brush : 125mm (5") / 150mm (6")
Abrasive disc : 125mm (5") / 150mm (6")
Diamond wheel : 125mm (5") / 150mm (6")
No load speed (rpm) 11,000
Overall length 356mm (14")
Spindle thread M16 x 2
Net weight 2.5kg (5.5lbs)

Model GA4030

720W motor
CB-450A/B



100mm (4") Angle Grinder

Continuous rating Input 720W
Capacity 100mm (4")
No load speed (rpm) 11,000
Overall length 360mm (7-1/8")
Dimensions 268 x 118 x 104mm
(L x W x H) (10-1/2" x 4-5/8" x 4-1/8")
Net weight 1.4kg (3.1lbs)

Model 9015B / 9016B

1,050W motor
CB-303A



125mm (5") / 150mm (6") Angle Grinder

Continuous rating Input 1,050W
Capacity Depressed center wheel : 125mm (5") / 150mm (6")
Wire cup brush : 90mm (3-1/2")
Abrasive disc : 125mm (5") / 150mm (6")
Diamond wheel : 125mm (5") : 9015B
Cut-off wheel : 150mm (6") : 9016B
No load speed (rpm) 10,000 : 9015B / 8,000 : 9016B
Overall length 381mm (15")
Net weight 2.4kg (5.3lbs)

Model GA5010 / GA5020

1,050W motor
CB-303A



125mm (5") Angle Grinder

Continuous rating Input 1,050W
Capacity Depressed center wheel : 125mm (5")
Abrasive disc : 125mm (5")
Diamond wheel : 125mm (5")
No load speed (rpm) 11,000
Dimensions (L x W x H)
GA5010 : 356 x 139 x 112mm (14" x 5-1/2" x 4-3/8")
GA5020 : 356 x 139 x 120mm (14" x 5-1/2" x 4-3/4")
Net weight 2.2kg (4.8lbs)

Model GA6010 / GA6020

1,050W motor
CB-303A



150mm (6") Angle Grinder

Continuous rating Input 1,050W
Capacity Depressed center wheel : 150mm (6")
Abrasive disc : 150mm (6")
Diamond wheel : 150mm (6")
No load speed (rpm) 10,000
Dimensions (L x W x H)
GA6010 : 356 x 169 x 112mm (14" x 6-5/8" x 4-3/8")
GA6020 : 356 x 169 x 120mm (14" x 6-5/8" x 4-3/4")
Net weight 2.2kg (4.8lbs)

Model 9077

2,000W motor
CB-204A
AUTO-CUT



180mm (7") Angle Grinder

Continuous rating Input 2,000W
Capacity Depressed center wheel : 180mm (7")
Wire cup brush : 110mm (4-3/8")
Abrasive disc : 180mm (7")
No load speed (rpm) 7,600
Overall length 484mm (19-1/8")
Net weight 5.3kg (11.6lbs)

Model 9617

2,000W motor
CB-204A
AUTO-CUT



180mm (7") Angle Grinder

Continuous rating Input 2,000W
Capacity Depressed center wheel : 180mm (7")
Wire cup brush : 110mm (4-3/8")
Abrasive disc : 180mm (7")
No load speed (rpm) 8,500
Overall length 456mm (18")
Net weight 4.9kg (10.8lbs)

Model 9607NB

1,800W motor
CB-103A



180mm (7") Disc Grinder

Continuous rating Input 1,800W
Capacity Depressed center wheel : 180mm (7")
Wire cup brush : 110mm (4-3/8")
Abrasive disc : 180mm (7")
Diamond wheel : 180mm (7")
No load speed (rpm) 8,000
Overall length 413mm (16-1/4")
Net weight 5kg (11lbs)

Model GA7001

2,000W motor
CB-103A



180mm (7") Disc Grinder

Continuous rating Input 2,000W
Capacity Depressed center wheel : 180mm (7")
Wire cup brush : 110mm (4-3/8")
Abrasive disc : 180mm (7")
Diamond wheel : 180mm (7")
No load speed (rpm) 8,000
Overall length 411.5mm (16-1/4")
Net weight 5.7kg (12.6lbs)

Model GA7020 / GA9020

2,200W motor
CB-204A
AUTO-CUT



180mm (7") / 230mm (9") Angle Grinder

Continuous rating Input 2,200W
Capacity Depressed center wheel : 180mm (7") / 230mm (9")
Wire cup brush : 110mm (4-3/8")
Cut-off wheel : 180mm (7") / 230mm (9")
No load speed (rpm) 8,500 : GA7020 / 6,600 : GA9020
Dimensions (L x W x H)
GA7020 : 473 x 209 x 140mm (18-5/8" x 7-7/8" x 5-1/2")
GA9020 : 473 x 249 x 140mm (18-5/8" x 9-3/4" x 5-1/2")
Net weight 4.7kg (10.4lbs)

Model GA7030 / GA9030

2,400W motor
CB-204A
AUTO-CUT



180mm (7") / 230mm (9") Angle Grinder

Continuous rating Input 2,400W
Capacity Depressed center wheel : 180mm (7") / 230mm (9")
Wire cup brush : 110mm (4-3/8")
Cut-off wheel : 180mm (7") / 230mm (9")
Hole dia. 22.23mm (7/8")
No load speed (rpm) 8,500 : GA7030 / 6,600 : GA9030
Dimensions (L x W x H)
GA7030 : 511 x 209 x 140mm (20-1/8" x 7-7/8" x 5-1/2")
GA9030 : 511 x 249 x 140mm (20-1/8" x 9-3/4" x 5-1/2")
Net weight 5.1kg (11.2lbs)

Compress Tools
Li-Ion
Drilling/Fastening
Impact
Cutting
Grinding/Sanding
Sawing
Planing/Trimming
Outdoor
Dust
Saw Series
Precision

Cordless Tools
 Li-Ion
 Drilling/Featuring
 Impact Drilling/Demolition
 Cutting
 Grooving/Landing
 Sawing
 Planing/Powering
 Outdoor Power Equipment
 Dust Extraction/Options
 SSP Series
 Pneumatic

Model HR1830

440W motor
CB-418A

18mm (11/16") Rotary Hammer

Continuous rating input: 440W
Capacity: Concrete: 18mm (11/16")
Concrete with Diamond core bit: 18mm (11/16")
Steel: 13mm (1/2")
Wood: 32mm (1-1/4")
Impacts per minute (ipm): 0-5,000
No load speed (rpm): 0-1,500
Dimensions (L x W x H): 275 x 66 x 208mm
(11" x 2-5/8" x 8-3/16")
Net weight: 1.7kg (3.7lbs)

Model HR2010

900W motor
CB-105A
AUTO-CLUT

20mm (3/4") Rotary Hammer

Continuous rating input: 900W
Capacity: Concrete: 20mm (3/4")
Steel: 13mm (1/2")
Wood: 24mm (15/16")
Impacts per minute (ipm): 0-4,000
No load speed (rpm): 0-900
Overall length: 300mm (11-7/8")
Net weight: 3.2kg (7.1lbs)

Model HR2230

710W motor
CB-325

22mm (7/8") Rotary Hammer

Continuous rating input: 710W
Capacity: Concrete: 22mm (7/8")
Steel: 13mm (1/2")
Wood: 32mm (1-1/4")
Impacts per minute (ipm): 0-4,050
No load speed (rpm): 0-1,050
Dimensions: 357 x 85 x 214mm
(14" x 3-1/4" x 8-3/8")
Net weight: 2.4kg (5.3lbs)

Model HR2450F

790W motor
CB-325

24mm (15/16") Rotary Hammer

Continuous rating input: 790W
Capacity: Concrete: 24mm (15/16")
Steel: 13mm (1/2")
Wood: 32mm (1-1/4")
Impacts per minute (ipm): 0-5,300
No load speed (rpm): 0-1,100
Dimensions: 362 x 85 x 214mm
(14-1/4" x 3-1/4" x 8-3/8")
Net weight: 2.5kg (5.6lbs)

Model HR2470 / HR2470FT

790W motor
CB-325

24mm (15/16") Combination Hammer

Continuous rating input: 790W
Capacity: Concrete: 24mm (15/16")
Steel: 13mm (1/2")
Wood: 32mm (1-1/4")
Impacts per minute (ipm): 0-4,500
No load speed (rpm): 0-1,100
Dimensions (L x W x H):
HR2470: 370 x 84 x 214mm (14-1/2" x 3-1/8" x 8-3/8")
HR2470FT: 384 x 84 x 215mm (15-1/2" x 3-1/8" x 8-3/8")
Net weight: 2.8kg (6.2lbs) / 2.9kg (6.3lbs)

Model HR2810/HR2811F/HR2811FT

900W motor
CB-325

28mm (1-1/8") Combination Hammer

Continuous rating input: 900W
Capacity: Concrete (with Diamond core bit): 28mm (1-1/8")
Concrete with T.C.T. bit: 25mm (1-1/8")
Steel: 13mm (1/2")
Wood: 32mm (1-1/4")
Impacts per minute (ipm): 0-4,500
No load speed (rpm): 0-1,100
Dimensions (L x W x H):
HR2810/HR2811F: 370 x 85 x 225mm (14-5/8" x 3-1/2" x 8-7/8")
HR2811FT: 345 x 85 x 225mm (13-5/8" x 3-1/2" x 8-7/8")
Net weight: 3.3kg (7.3lbs) / HR2810/HR2811F: 3.4kg (7.5lbs) / HR2811FT: 3.4kg (7.5lbs)

Model HR3000C

850W motor
CB-327A

30mm (1-3/16") Rotary Hammer

Continuous rating input: 850W
Capacity: Concrete (with T.C.T. bit): 30mm (1-3/16")
Concrete (with Core bit): 30mm (1-3/16")
Steel: 13mm (1/2")
Wood: 90mm (3-1/2")
Impacts per minute (ipm): 1,650 - 3,300
No load speed (rpm): 300 - 720
Overall length: 591mm (23-3/8")
Net weight: 4.8kg (10.6lbs)

Model HR3200C / HR3210C

950W motor
CB-330
AUTO-CLUT

32mm (1-1/4") Combination Hammer

Continuous rating input: 950W
Capacity: Concrete (with Diamond core bit): 32mm (1-1/4") / HR3200C
Concrete (with T.C.T. bit): 30mm (1-1/8") / HR3210C
Steel: 13mm (1/2")
Wood: 32mm (1-1/4")
Impacts per minute (ipm): 1,650-3,300
No load speed (rpm): 315-630
Dimensions (L x W x H):
HR3200C: 398 x 105 x 233mm (15-5/8" x 4-1/4" x 9-1/8")
HR3210C: 398 x 114 x 238mm (15-5/8" x 4-1/2" x 9-3/8")
Net weight: 4.4kg (9.7lbs) / 4.8kg (10.6lbs)

Model HR3530

1,000W motor
CB-330
AUTO-CLUT

35mm (1-3/8") Rotary Hammer

Continuous rating input: 1,000W
Max. bit dia.: 35mm (1-3/8")
Capacity: Concrete (with Core bit): 195mm (6-5/8")
Impacts per minute (ipm): 3,100
No load speed (rpm): 780
Dimensions: 371 x 100 x 240mm
(L x W x H): 14.24" x 3.93" x 9.45"
Net weight: 5.2kg (11.5lbs)

Model HR4030C

1,100W motor
CB-100
AUTO-CLUT

40mm (1-9/16") Rotary Hammer

Continuous rating input: 1,100W
Capacity: Concrete (with T.C.T. bit): 40mm (1-9/16")
Concrete (with Core bit): 118mm (4-5/8")
Impacts per minute (ipm): 1,300-2,600
No load speed (rpm): 230-460
Dimensions: 413 x 107 x 247mm
(L x W x H): 16-1/4" x 4-1/4" x 9-3/4"
Net weight: 6.2kg (13.7lbs)

Model HR4011C

1,100W motor
CB-05A
AUTO-CLUT

40mm (1-9/16") Rotary Hammer

Continuous rating input: 1,100W
Capacity: Concrete (with T.C.T. bit): 40mm (1-9/16")
Concrete (with Core bit): 105mm (4-1/8")
Impacts per minute (ipm): 1,350-2,750
No load speed (rpm): 235-490
Dimensions: 468 x 116 x 261mm
(L x W x H): 18-1/2" x 4-9/16" x 10-1/4"
Net weight: 6.3kg (13.9lbs)

Model HR4501C / HR4511C

1,300W motor
CB-171
AUTO-CLUT

45mm (1-3/4") Rotary Hammer

Continuous rating input: 1,300W
Capacity: Concrete (with T.C.T. bit): 45mm (1-3/4")
Concrete (with Core bit): 125mm (5")
Impacts per minute (ipm): 1,750-2,750
No load speed (rpm): 130-280
Dimensions (L x W x H):
HR4501C: 458 x 121 x 288mm (18" x 4-3/4" x 11-3/8")
HR4511C: 458 x 136 x 288mm (18" x 5-3/8" x 11-3/8")
Net weight: 7.5kg (16.6lbs) / 8.9kg (19.6lbs)

Model HR5211C

1,500W motor
CB-171
AUTO-CLUT

52mm (2") Rotary Hammer

Continuous rating input: 1,500W
Capacity: Concrete (with T.C.T. bit): 52mm (2")
Concrete (with Core bit): 180mm (6-1/4")
Impacts per minute (ipm): 1,070-2,150
No load speed (rpm): 130-260
Dimensions: 539 x 149 x 287mm
(L x W x H): 21-1/2" x 5-7/8" x 11-1/4"
Net weight: 11.6kg (25.6lbs)

Model HM0810T

900W motor
CB-105A
AUTO-CLUT

17mm (11/16") Hex Shank Demolition Hammer

Continuous rating input: 900W
Impacts per minute (ipm): 2,000
Overall length: 626mm (24-7/8")
Net weight: 5.5kg (12.1lbs)

Model HM1100 / HM1100C

1,000W motor
CB-327A

SDS-MAX Shank Demolition Hammer

Continuous rating input: 1,000W
Impacts per minute (ipm): 2,650 - HM1100
1,300-2,650 - HM1100C
Overall length: 504mm (20-5/8")
Net weight: 6.1kg (13.5lbs)

Model HM1201

1,300W motor
CB-105A
AUTO-CLUT

21mm (13/16") Hex Shank Demolition Hammer

Continuous rating input: 1,300W
Impacts per minute (ipm): 2,000
Overall length: 680mm (26-7/8")
Net weight: 8.7kg (19.1lbs)

Model HM1202C

1,450W motor
CB-155A
AUTO-CUT

SDS-MAX Shank Demolition Hammer

Continuous rating input	1,450W
Impacts per minute (ipm)	950-1,000
Overall length	578mm (22-3/4")
Net weight	9.0kg (20.5lb)

🔧 📏 📏 📏 📏 📏

Model HM1306

1,510W motor
CB-204A
AUTO-CUT

30mm (1-3/16") Hex Shank Demolition Hammer

Continuous rating input	1,510W
Impacts per minute (ipm)	1,450
Dimensions	652 x 121 x 231mm
(L x W x H)	25-3/4" x 4-3/4" x 9-1/8"
Net weight	15kg (33.5lb)

🔧 📏 📏 📏

Model HM1400

1,240W motor
CB-155A
AUTO-CUT

30mm (1-3/16") Hex Shank Electric Breaker

Continuous rating input	1,240W
Impacts per minute (ipm)	1,200
Overall length	613mm (24-1/8")
Net weight	17kg (37.4lb)

🔧 📏 📏

Model HM1500

1,470W motor
CB-204A
AUTO-CUT

30mm (1-3/16") Hex Shank Demolition Hammer

Continuous rating input	1,470W
Impacts per minute (ipm)	1,300
Overall length	647mm (25-1/2")
Net weight	17kg (37.5lb)

🔧 📏 📏 📏

Model HM1801 / HM1810

2,100W motor
CB-206A
AUTO-CUT

28.6mm (1-1/8") Hex Shank Electric Breaker

Continuous rating input	2,100W
Impacts per minute (ipm)	1,100
Dimensions	824 x 148 x 204mm
(L x W x H)	32-1/2" x 5-7/8" x 24-1/2"
Net weight	30kg (66.2lb) : HM1801 32kg (70.6lb) : HM1810

🔧 📏 📏 📏

Model HK0500

650W motor
CB-113

SDS-Plus Shank Power Scraper

Continuous rating input	650W
Impacts per minute (ipm)	2,000-3,500
Overall length	466mm (18-7/16")
Net weight	2.1kg (4.6lb)

🔧 📏 📏 📏

Model HK1820

850W motor
CB-350
AUTO-CUT

SDS-Plus Shank Power Scraper

Continuous rating input	850W
Impacts per minute (ipm)	0-3,000
Dimensions	351 x 102 x 203mm
(L x W x H)	13-3/4" x 4" x 8"
Net weight	3.3kg (7.3lb)

🔧 📏 📏 📏

Model MUH353G / MUH353R

350W motor
CB-63A

350mm (14") Electric Hedge Trimmer

Continuous rating input	350W
Blade length	350mm
Net weight	1.7kg (3.7lb)

🔧 📏 📏

Model RBC411

2 stroke

40.2mL-2stroke Petrol Brush Cutter

Displacement	40.2mL
Fuel tank	1.0L
Dimensions	310 x 290 x 345mm
(L x W x H)	12-1/4" x 11-3/8" x 13-3/8"
Net weight	3.8kg (8.4lb)

🔧 📏 📏 📏

Model EBH340U

4 stroke

33.5mL-4stroke Petrol Brush Cutter

Displacement	33.5mL
Engine power	1.07kW/1.4HP
Fuel tank	0.65L
Dimensions	1,900 x 645 x 510mm
(L x W x H)	74-3/4" x 25-3/8" x 20"
Net weight	7.3kg (16.5lb)

🔧 📏 📏 📏

Model EBH340R

4 stroke

33.5mL-4stroke Backpack Petrol Brush Cutter

Displacement	33.5mL
Engine power	1.07kW/1.4HP
Fuel tank	0.65L
Dimensions	402 x 325 x 395mm
(L x W x H)	15-3/4" x 12-3/4" x 15-1/2"
Net weight	9.8kg (21.6lb)

🔧 📏 📏 📏

Model ELM3300

1,100W motor

Electric Lawn Mower

Deck	FP
Surface up to (m²)	400
Deck width	35cm
Electric Motor	1,100W
Cutting height	25mm / 35mm
Gross box capacity	27L
Drive	Push
Weight	11.5kg
Cutting system	3Cut

🔧 📏 📏

Model 6723DW

4.8V

Cordless Screwdriver

No load speed (rpm)	220
Max. fastening torque	4.24Nm (40in.lbs)
Dimensions	292 x 48 x 60mm
(L x W x H)	(11-1/2" x 1-15/16" x 2-3/8")
Net weight	0.42kg (0.9lb)
Voltage	4.8V

🔧 📏 📏 📏

Model 6010DW / 6010DWE

7.2V
4000RPM
Tool Retainer

10mm (3/8") Cordless Drill

Capacity	Steel : 10mm (3/8") Wood : 10mm (3/8") Wood screw : 4.5 x 20mm (3/16" x 3/4")
No load speed (rpm)	600
Max. fastening torque	Hard / Soft : 7 / 5Nm
Overall length	227mm (9")
Net weight	1.1kg (2.4lb)
Voltage	7.2V

🔧 📏 📏 📏

Model 6019DW

7.2V

10mm (3/8") Cordless Driver Drill

Capacity	Steel : 10mm (3/8") Wood : 10mm (3/8") Wood screw : 5.1 x 35mm (3/8" x 1-3/8") Machine screw : 6mm (1/4")
No load speed (rpm)	H : 0-600 / Lo : 0-200
Max. fastening torque	Hard / Soft : 16 / 10Nm
Overall length	251mm (9-7/8")
Net weight	1.1kg (2.4lb)
Voltage	7.2V

🔧 📏 📏 📏

Model 6261DW / 6261DWE

9.6V
4000RPM
Tool Retainer

10mm (3/8") Cordless Driver Drill

Capacity	Steel : 10mm (3/8") Wood : 21mm (13/16")
No load speed (rpm)	H : 0-1,500 Lo : 0-400
Max. fastening torque	Hard / Soft : 24 / 14Nm
Overall length	190mm (7-5/16")
Net weight	1.4kg (3.1lb)
Voltage	9.6V

🔧 📏 📏 📏

Cordless tools
 Lithium
 Drilling/Fastening
 Impact
 Drilling/Drumming
 Cutting
 Grasscutting/Weeding
 Blowing
 Pruning/Trimming
 Outdoor Power Equipment
 Dust Extractors/Blowers
 SSP Saws
 Pneumatic

Cordless tools
 Lawn
 Drilling/Fastening
 Impact
 Drilling/Removal
 Cutting
 Drilling/Sanding
 Sewing
 Planing/Fluting
 Outdoor Power Equipment
 Dust
 Extractors/Other
 SSP Series
 Pneumatic

Model 6271DW / 6271DWE

12V
+ 4300mAh (Two Batteries)

10mm (3/8") Cordless Driver Drill

Capacity	Steel : 10mm (3/8") Wood : 25mm (1")
No load speed (rpm)	Hi : 0-1,300 Lo : 0-400
Max. fastening torque	Hard / Soft : 30 / 18Nm
Overall length	192mm (7-0/16")
Net weight	1.5kg (3.3 lbs)
Voltage	12V

Model 6281DW / 6281DWE

14.4V
+ 4300mAh (Two Batteries)

10mm (3/8") Cordless Driver Drill

Capacity	Steel : 10mm (3/8") Wood : 25mm (1")
No load speed (rpm)	Hi : 0-1,300 Lo : 0-400
Max. fastening torque	Hard / Soft : 35 / 20Nm
Overall length	192mm (7-0/16")
Net weight	1.6kg (3.5 lbs)
Voltage	14.4V

Model 8271DW / 8271DWE

12V
+ 4311mAh (Two Batteries)

16mm (5/8") Cordless Hammer Driver Drill

Capacity	Steel : 10mm (3/8") Wood : 25mm (1") Masonry : 8mm (5/16")
Impacts per minute (ipm)	Hi : 0-19,500 Lo : 0-6,000
No load speed (rpm)	Hi : 0-1,300 Lo : 0-450
Max. fastening torque	Hard / Soft : 30 / 18Nm
Dimensions (L x W x H)	(6-1/4" x 3-3/4" x 9-1/2")
Net weight	1.6kg (3.5 lbs)
Voltage	12V

Model 8281DW / 8281DWE

14.4V
+ 4311mAh (Two Batteries)

16mm (3/8") Cordless Hammer Driver Drill

Capacity	Steel : 10mm (3/8") Wood : 25mm (1") Masonry : 15mm (3/8")
Impacts per minute (ipm)	Hi : 0-19,500 Lo : 0-6,000
No load speed (rpm)	Hi : 0-1,300 Lo : 0-400
Max. fastening torque	Hard / Soft : 36 / 20Nm
Dimensions (L x W x H)	(6-1/4" x 3-3/4" x 9-1/2")
Net weight	1.7kg (3.7 lbs)
Voltage	14.4V

Model DF030DWE / DF330DWE

10.8V
+ 2000mAh (Two Batteries)

10mm (3/8") Cordless Driver Drill

Capacity	Steel : 10mm (3/8") Wood : 21mm (13/16")
No load speed (rpm)	Hi : 0-1,300 / Lo : 0-250
Max. fastening torque	Hard / Soft : 24 / 14Nm
Net weight	0.85kg (1.8 lbs) : DF030D 1.0kg (2.2 lbs) : DF330D
Voltage	10.8V

Model TD090D

10.8V

Cordless Impact Driver

Capacity	Machine screw : M4-M8 (5/32" - 5/16") Standard bolt M5-M12 (3/16" - 1/2") High tensile bolt : M4-M10 (3/16" - 3/8")
Coarse thread fit length	20-40mm (7/8" - 1-1/2")
Impacts per minute (ipm)	0-3,000
No load speed (rpm)	0-2,400
Max. fastening torque	90Nm (80ft-lbs)
Dimensions (L x W x H)	155 x 54 x 178mm (6-1/8" x 2-1/8" x 7")
Net weight	0.50kg (1.1 lbs)
Voltage	10.8V

Model TD0100

200W motor

Impact Driver (Pistol-type)

Capacity	Machine screw : M4 - M8 (5/32" - 5/16") Standard bolt : M5 - M14 (3/16" - 9/16") High tensile bolt : M5 - M10 (3/16" - 3/8")
Continuous rating input	200W
Impacts per minute (ipm)	0-3,000
No load speed (rpm)	0-3,000
Net Weight	1.1kg (2.4 lbs)

Model TD0101F

200W motor

Impact Driver (T-type)

Capacity	Machine screw : M4 - M8 (5/32" - 5/16") Standard bolt : M5 - M14 (3/16" - 9/16") High tensile bolt : M5 - M10 (3/16" - 3/8")
Continuous rating input	200W
Impacts per minute (ipm)	0-3,000
No load speed (rpm)	0-3,000
Net Weight	1.1kg (2.4 lbs)

Model 6951 / 6952

300W motor
CB-411A + 800

Impact Driver

Continuous rating input	300W : 6951 / 275W : 6952
Capacity	Machine screw : M4 - M10 (5/32" - 3/8") : 6952 Standard bolt : M5 - M12 (1/4" - 1/2") : 6951 High tensile bolt : M5 - M14 (3/16" - 9/16") : 6952 Driving shank Hex : 4.35mm (5/16") : 6952
Impacts per minute (ipm)	0-3,000 : 6951 / 0-3,100 : 6952
No load speed (rpm)	0-2,200 : 6951 / 0-3,000 : 6952
Max. fastening torque	95Nm (7,000kg-cm) : 6951 16 : 120Nm (86.9ft-lb) : 6952

Model 6700N

190W motor
CB-54A

Screwdriver

Continuous rating input	190W
Capacity	Nuts : 6mm (1/4") Wood screw : 5.5mm (7/32") Machine screw : 6mm (1/4") Driving shank (Hex) : 6mm (1/4")
No load speed (rpm)	500
Overall length	295mm
Net weight	1.1kg (2.7 lbs)

Model 6821

570W motor
CB-415A

Drywall Screwdriver

Continuous rating input	570W
Capacity	Drywall screw : 5mm (3/16") Self drilling screw : 6mm (1/4") Driving shank (Hex) : 6.35mm (1/4")
No load speed (rpm)	0-4,000
Overall length	272mm (10-3/4")
Net weight	1.3kg (2.9 lbs)

Model 68028V

510W motor
CB-64A

Screwdriver

Capacity	Self drilling screw : 6mm (1/4") Driving shank : 1/4" Hex
Continuous rating input	510W
No load speed (rpm)	0-2,500
Overall length	265mm (10-1/2")
Net weight	1.7kg (3.7 lbs)

Model 6501

300W motor
CB-70A

6.5mm (1/4") High Speed Drill

Continuous rating input	300W
Capacity	Steel : 6.5mm (1/4") Wood : 8mm (5/16")
No load speed (rpm)	4,500
Overall length	305mm (12-1/8")
Net weight	0.9kg (2.0 lbs)

Model 6411 / 6412

450W motor
CB-54A

10mm (3/8") Drill

Continuous rating input	450W
Capacity	Steel : 10mm (3/8") Wood : 25mm (1")
No load speed (rpm)	3,000
Dimensions (L x W x H)	226 x 64 x 183mm (9" x 2-1/2" x 7-1/4")
Net weight	1.7kg (3.8 lbs)

Model 6010B

300W motor
CB-61A

10mm (3/8") Drill

Continuous rating input	300W
Capacity	Steel : 10mm (3/8") Wood : 15mm (5/8")
No load speed (rpm)	1,800
Overall length	223mm (8-11/16")
Net weight	1.5kg (3.3 lbs)

Model 6401


360W motor
CB-106A

10mm (3/8") Drill

Continuous rating input	360W
Capacity	Steel : 10mm (3/8") Wood : 18mm (3/4")
No load speed (rpm)	1,700
Overall length	320mm (12-5/8")
Net weight	2.2kg (4.9 lbs)

Model 6301

700W motor
CB-105A



13mm (1/2") Drill

Continuous rating Input 700W
Capacity Steel : 13mm (1/2")
Wood : 35mm (1-3/8")

No load speed (rpm) 1,500
Overall length 340mm (13-3/8")
Net weight 2.6kg (5.7lbs)

Model 6300-4

650W motor
CB-51A



13mm (1/2") 4-Speed Drill

Continuous rating Input 650W
Capacity Steel : 13mm (1/2")
Wood : 35mm (1-1/8")

No load speed (rpm) 500 / 600 / 1,100 / 1,300
Overall length 365mm (15-1/8")
Net weight 3.2kg (7lbs)

Model 6300NB

650W motor
CB-51A



13mm (1/2") Drill

Continuous rating Input 650W
Capacity Steel : 13mm (1/2")
Wood : 30mm (1-1/8")

No load speed (rpm) 1,200
Overall length 345mm (13-5/8")
Net weight 2.7kg (5.9lbs)

Model HP1230

400W motor
CB-415A



12mm (15/32") Hammer Drill

Continuous rating Input 400W
Capacity Concrete : 12mm (15/32")
Steel : 10mm (3/8")
Wood : 15mm (9/16")

Impacts per minute (ipm) 0-31,500
No load speed (rpm) 0-2,000
Dimensions L x W x H 100 x 67 x 188mm
(4-3/8" x 2-5/8" x 7-3/8")
Net weight 1.4kg (3.1lbs)

Model HP1630 / HP1630KSP

710W motor
CB-65A



16mm (5/8") Hammer Drill

Continuous rating Input 710W
Capacity Concrete : 16mm (5/8")
Steel : 13mm (1/2")
Wood : 35mm (1-3/8")

Impacts per minute (ipm) 0-48,000
No load speed (rpm) 0-3,200
Dimensions 196 x 76 x 204mm
(7-7/8" x 3" x 8")
Net weight 1.8kg (4.0lbs)

Model NHP1300S

430W motor
CB-415A



13mm (1/2") Hammer Drill

Continuous rating Input 430W
Capacity Concrete : 13mm (1/2")
Steel : 13mm (1/2")
Wood : 18mm (11/16")

No load speed (rpm) 0-2,700
Blows per minute 0-29,700
Overall length 278mm (10-7/8")
Net weight 1.7kg (3.7lbs)

Model NHP1320S

430W motor
CB-415A



13mm (1/2") Hammer Drill

Continuous rating Input 430W
Capacity Concrete : 13mm (1/2")
Steel : 13mm (1/2")
Wood : 18mm (11/16")

No load speed (rpm) 2,700
Blows per minute 0-29,700
Overall length 278mm (10-7/8")
Net weight 1.7kg (3.7lbs)

Model DP4010

720W motor
CB-415A



13mm (1/2") 2-Speed Drill

Continuous rating Input 720W
Capacity Steel H: 8mm (5/16")
Steel Lo: 13mm (1/2")
Wood H: 25mm (1")
Wood Lo: 40mm (1-9/16")

No load speed (rpm) H: 0-2,000
Lo: 0-1,200
Dimensions L x W x H 135.55 x 2-3/4" x 8-5/8"
Net weight 2.2kg (4.8lbs)

Model HP2050 / HP2051

720W motor
CB-415A



20mm (3/4") 2-Speed Hammer Drill

Continuous rating Input 720W
Capacity Concrete : 20mm (3/4")
Steel H: 8mm (5/16")
Steel Lo: 13mm (1/2")
Wood H: 25mm (1")
Wood Lo: 40mm (1-9/16")

Impacts per minute (ipm) H: 0-58,000 / Lo: 0-24,000
No load speed (rpm) H: 0-2,900
Lo: 0-1,200

Model 8416

670W motor
CB-55A



16mm (5/8") Hammer Drill

Continuous rating Input 670W
Capacity Concrete : 16mm (5/8")
Steel : 13mm (1/2")

Impacts per minute (ipm) 21,000
No load speed (rpm) 1,400
Overall length 351mm (13-3/4")
Net weight 2.6kg (5.7lbs)

Model 8419B

650W motor
CB-51A



19mm (3/4") 2-Speed Hammer Drill

Continuous rating Input 650W
Capacity Concrete : 19mm (3/4")
Steel : 13mm (1/2")
Wood : 30mm (1-3/16")

Blows per minute (ipm) H: 14,000 Lo: 11,000
No load speed (rpm) H: 1,300 Lo: 1,000
Overall length 370mm (14-1/2")
Net weight 3kg (6.6lbs)

Model 8420V

650W motor
CB-105A



20mm (3/4") Hammer Drill

Continuous rating Input 650W
Capacity Concrete : 20mm (3/4")
Steel : 13mm (1/2")
Wood : 30mm (1-3/16")

Blows per minute 0-21,000
No load speed (rpm) 0-1,400
Overall length 368mm (14-1/2")
Net weight 3kg (6.6lbs)

Model 6013B

620W motor
CB-51A



13mm (1/2") Drill

Continuous rating Input 620W
Capacity Steel : 13mm (1/2")
Wood : 35mm (1-3/8")

No load speed (rpm) 550
Overall length 340mm (13-3/8")
Net weight 2.8kg (6.2lbs)

Model 6016

480W motor
CB-51A



16mm (5/8") Drill

Continuous rating Input 480W
Capacity Steel : 16mm (5/8")
Wood : 35mm (1-3/8")

No load speed (rpm) 700
Overall length 365mm (14-3/8")
Net weight 4.4kg (9.7lbs)

Model JN1601

550W motor
CB-411A



1.6mm Nibbler

Continuous rating Input 550W
Capacity Steel up to 400 N/mm² : 1.6mm
Steel up to 600 N/mm² : 1.2mm
Steel up to 800 N/mm² : 0.8mm
Aluminum up to 200 N/mm² : 2.5mm

Min. cutting radius Outside edge : 50mm (2")
Inside edge : 48mm (1-3/4")

Strokes per minute (spm) 2,200
Overall length 261mm (10-1/4")

Model JN3200

660W motor
CB-100A



3.2mm Nibbler

Continuous rating Input 660W
Capacity Steel up to 400 N/mm² : 3.2mm
Steel up to 600 N/mm² : 2.5mm
Steel up to 800 N/mm² : 1.6mm
Aluminum up to 200 N/mm² : 3.5mm

Min. cutting radius Outside edge : 128mm (5-1/16")
Inside edge : 120mm (4-3/4")

Strokes per minute (spm) 1,300
Overall length 215mm (8-1/2")

Cordless tools
 U-line
 Cutting/trimming
 Impact
 Drilling/Driving
 Cutting
 Grinding/Sanding
 Sawing
 Planning/Routing
 Outdoor Power Equipment
 Dust Extractors/Drum
 SSP Series
 Pneumatic

Model JS1600

300W motor
CB-35A

1.6mm Shear

Continuous rating input 300W
Capacity
Steel up to 400 N/mm² / 1.6mm
Steel up to 600 N/mm² / 1.2mm
Steel up to 800 N/mm² / 0.8mm
Aluminium up to 200 N/mm² / 2.5mm

Min. cutting radius 30mm (1-3/16")
Strokes per minute (spm) 4,000
Overall length 230mm (9")
Net weight 1.7kg (3.7lb)

Model JS3200

600W motor
CB-105A

3.2mm Shear

Continuous rating input 600W
Capacity
Steel up to 400 N/mm² / 3.2mm
Steel up to 600 N/mm² / 2.5mm
Steel up to 800 N/mm² / 1.5mm
Aluminium up to 200 N/mm² / 4.0mm

Min. cutting radius 30mm (2")
Strokes per minute (spm) 1,600
Overall length 204mm (8")
Net weight 3.0kg (7.7lb)

Model JR3050T

1,010W motor
CB-305A

Recipro Saw

Continuous rating input 1,010W
Capacity
in pipe: 90mm (3-1/2")
in wood: 80mm (3-1/2")

Length of stroke 29mm (1-1/8")
Strokes per minute (spm) 0-2,600
Dimensions (L x W x H) 432 x 97 x 170mm (17-3/4" x 3-13/16" x 6-11/16")
Net weight 3.2kg (7.1lb)

Model JR3070CT

1,510W motor
CB-307A

Recipro Saw

Continuous rating input 1,510W
Capacity
in pipe: 130mm (5-1/8")
in wood: 255mm (10")

Length of stroke 32mm (1-1/4")
Strokes per minute (spm) 0-2,000
Dimensions (L x W x H) 495 x 99 x 181mm (19-1/8" x 3-7/8" x 7-1/8")
Net weight 4.2kg (9.3lb)

Model AF301ZK

Narrow Crown Stapler

Operating air pressure 60-100PSIG (4-7kgf/cm²G)

Applicable staples
Length 10mm-20mm (13/32" - 7/8")
Width 1.25mm (0.050")
Staple capacities 100pcs
Overall length 250mm (10")
Net weight 1.3kg (2.8lb)

Model AT422AZK

Narrow Crown Stapler

Operating air pressure 60-100PSIG (4-7kgf/cm²G)

Applicable staples
Length 10mm-20mm (13/32" - 7/8")
Width 1.5mm (0.045")
Staple capacities 100pcs
Overall length 200mm (8")
Net weight 1.3kg (2.8lb)

Model AT1022AZK

Narrow Crown Stapler

Operating air pressure 60-100PSIG (4-7kgf/cm²G)

Applicable staples
Length 10mm-20mm (13/32" - 7/8")
Width 1.9mm (0.046")
Staple capacities 100pcs
Overall length 250mm (10")
Net weight 1.3kg (2.8lb)

Model SJ401

50W motor

Scroll Saw

Continuous rating input 50W
Capacity
Thickness of cut: 50mm (2")
Inset: 40mm (1.6")
Length of stroke 18mm (11/16")
Strokes per minute (spm) 400-1,600
Overall length 630mm (25-5/8")
Net weight 14.1kg (31lb)

Model TD020DS / TD020DSW

7.2V

Cordless Impact Driver

Capacity
Machine screw M3 - M8 (1/8" - 5/16")
Standard bolt M3 - M8 (1/8" - 5/16")
High tensile bolt M3 - M6 (1/8" - 1/4")
Coarse thread length 22mm / 40mm (7/8" / 1-3/4")

Impacts per min. (ipm) 3,000
No load speed (rpm) 2,300
Max. fastening torque 20Nm (177in-lb)
Net weight 0.63kg (1.39lb)
Voltage 7.2V

Model 9820-2

300mm (7-7/8") Sharpener

Dimensions (L x W x H) 210 x 25 x 75mm (7-7/8" x 1" x 3")
Hz 50-60
No load speed (rpm) 400-500
Overall length 360mm
Net weight 6.5kg (14.3lb)

Model UT1305

650W motor
CB-303A

Mixer

Continuous rating input 650W
Mixing blade diameter 165mm (6-1/2")
No load speed (rpm) 1,200
Dimensions 942 x 87 x 152mm (37" x 3-7/16" x 6")
Net weight 3.2kg (7.1lb)

Model UT2204

650W motor
CB-303A

Mixer

Continuous rating input 650W
Mixing blade diameter 200mm (8-5/8")
No load speed (rpm) 550
Dimensions 923 x 89 x 152mm (36-1/2" x 3-1/2" x 6")
Net weight 2.7kg (5.9lb)

Model PC1100 / PC5000C / PC5001C

1,020W motor
CB-101A

110mm (4-3/8") Concrete Planer

Continuous rating input 1,020W
Wheel dia. 110mm (4-3/8")
Hole dia. 10mm (5/8")
No load speed (rpm) 10,000
Overall length 418mm (16-1/2")
Net weight 4.3kg (9.5lb)

Model GC5000

930W motor
CB-153A

125mm (5") Stone Grinder

Continuous rating input 930W
Max. wheel size 125 x 75mm (5" x 3")
Hole dia. 22, 13mm
No load speed (rpm) 4,250
Overall length 454mm (17-7/8")
Net weight 5.2kg (11.4lb)

Model DA3010

450W motor
CB-410A

10mm (3/8") Angle Drill

Continuous rating input 450W
Capacity
Steel: 10mm (3/8")
Wood: 25mm (1")

No load speed (rpm) 0-2,600
Overall length 270mm (10-5/8")
Net weight 1.4kg (3.1lb)

Model HG6003

1,800W motor

Heat Gun

Continuous rating input Lo: 900W
Hi: 1,800W
Air temperature (degrees C) Lo: 400
Hi: 600
Air flow Lo: 280L/min
Hi: 350L/min
Net weight 1.00kg

Model BHR202RFE / BHR241RFE


18V
CB-441

20mm (3/4") / 20mm (3/4") Cordless Combination Hammer

Capacity
Concrete: 20mm (3/4") - BHR202RFE
Concrete: 25mm (1 1/8") - BHR241RFE
Steel: 13mm (1/2")
Wood: 26mm (1")

Impacts per minute (ipm)
0-4,000

No load speed (rpm)
0-1,000 - BHR202RFE
0-1,100 - BHR241RFE

Net weight
3.2kg (7.0lbs)

Voltage
18V

Model BGA402RFE


18V
CB-420

100mm (4") Cordless Angle Grinder

Capacity
Depressed center wheel: 100mm (4")
Abrasive disc: 100mm (4")
Diamond wheel: 100mm (4")

No load speed (rpm)
10,000

Dimensions (L x W x H)
217 x 118 x 118mm
(8 1/2" x 4 5/8" x 4 5/8")

Net weight
1.9kg (4.2lbs)

Voltage
18V

Model BJR181RFE


18V
CB-445

Cordless Recipro Saw

Capacity
In pipe: 133mm (5 1/8")
In wood: 255mm (10")

Length of stroke
23mm (1 1/8")

Strokes per minute (spm)
0-2,500

Dimensions (L x W x H)
499 x 91 x 234mm
(19 5/8" x 3 5/8" x 9 1/4")

Net weight
3.7kg (8.1lbs)

Voltage
18V

Model BTD140RFE


18V
CB-440

Cordless Impact Driver

Capacity
Machine screw: M4-M6 (5/16" - 3/8")
Standard bolt: M5-M14 (3/16" - 9/16")
High tensile bolt: M5-M12 (3/16" - 1/2")
Case thread in depth: 22-125mm (7/8" - 4 7/8")

Impacts per minute (ipm)
0-3,200

No load speed (rpm)
0-2,200

Max. fastening torque
145N·m (1,070in·lb)

Dimensions (L x W x H)
146x50mm (5 3/4"x 1 9/16")

Net weight
1.2kg (2.6lbs)

Voltage
18V

Model BTW251RFE


18V
CB-442

12.7mm (1/2") Cordless Impact Wrench

Capacity
Standard bolt: M10-M16 (3/8" - 5/8")
High tensile bolt: M10-M14 (3/8" - 9/16")
Square drive: 12.7mm (1/2")

Impacts per minute (ipm)
0-3,200

No load speed (rpm)
0-2,100

Max. fastening torque
230N·m (2,040in·lb)

Dimensions (L x W x H)
165 x 79 x 234mm
(6 1/2" x 3 1/8" x 9 1/4")

Net weight
1.7kg (3.7lbs)

Voltage
18V

Model BTW450RFE


18V
CB-441

12.7mm (1/2") Cordless Impact Wrench

Capacity
Square drive: 12.7mm (1/2")

Impacts per minute (ipm)
2,700

No load speed (rpm)
1,600

Max. fastening torque
440N·m (3,900in·lb)

Dimensions (L x W x H)
266 x 82 x 230mm
(10 1/2" x 3 1/8" x 9 1/8")

Net weight
3.4kg (7.5lbs)

Voltage
18V

Model BML185 / BML145


18V
+ BML185
14.4V
+ BML145

Rechargeable Flashlight

Continuous use (minutes)
200/3,000h - BML185
220/3,000h - BML145

Overall length
284mm (11 1/8")

Net weight
0.36kg (0.79lbs)

Voltage
18V - BML185
14.4V - BML145

Model BDF450RFE


18V
CB-440

13mm (1/2") Cordless Driver Drill

Capacity
Steel: 13mm (1/2")
Wood: 27mm (1 1/8")

No load speed (rpm)
Hi: 0-1,400
Lo: 0-400

Max. fastening torque
Hand / Soft: 41 / 25N·m

Dimensions (L x W x H)
186 x 70 x 214mm
(7 3/8" x 3 1/8" x 8 5/8")

Net weight
1.7kg (3.7lbs)

Voltage
18V

Model BDF453RFE / BDF453SHE


18V

13mm (1/2") Cordless Driver Drill

Capacity
Steel: 13mm (1/2")
Wood: 26mm (1 1/8")

No load speed (rpm)
Hi: 0-1,300
Lo: 0-400

Max. fastening torque
Hard / Soft: 42 / 27N·m

Dimensions (L x W x H)
220 x 79 x 227mm
(8 5/8" x 3 1/8" x 8 15/16")

Net weight
1.6kg (3.5lbs)

Voltage
18V

Model BHP453RFE / BHP453SHE


18V

13mm (1/2") Cordless Hammer Driver Drill

Capacity
Steel: 13mm (1/2")
Wood: 35mm (1 3/8")
Masonry: 13mm (1/2")

Impacts per minute (ipm)
Hi: 0-19,500 Lo: 0-6,000

No load speed (rpm)
Hi: 0-1,300 Lo: 0-400

Max. fastening torque
Hard / Soft: 42 / 27N·m

Dimensions (L x W x H)
239 x 79 x 227mm
(9 3/8" x 3 1/8" x 8 15/16")

Net weight
1.7kg (3.7lbs)

Voltage
18V

Model BDF343RFE / BDF343SHE


14.4V

10mm (3/8") Cordless Driver Drill

Capacity
Steel: 10mm (3/8")
Wood: 25mm (1")

No load speed (rpm)
Hi: 0-1,300
Lo: 0-400

Max. fastening torque
Hard / Soft: 36 / 20N·m

Dimensions (L x W x H)
192 x 79 x 220mm
(7 5/8" x 3 1/8" x 8 7/8")

Net weight
1.2kg (2.6lbs)

Voltage
14.4V

Model BHP343RFE / BHP343SHE


14.4V

10mm (3/8") Cordless Hammer Driver Drill

Capacity
Steel: 10mm (3/8")
Wood: 25mm (1")
Masonry: 10mm (3/8")

Impacts per minute (ipm)
Hi: 0-15,500 Lo: 0-6,000

No load speed (rpm)
Hi: 0-1,300 Lo: 0-400

Max. fastening torque
Hard / Soft: 36 / 20N·m

Dimensions (L x W x H)
212 x 79 x 220mm
(8 3/8" x 3 1/8" x 8 7/8")

Net weight
1.3kg (2.9lbs)

Voltage
14.4V

Model BDF440RFE


14.4V
CB-440

13mm (1/2") Cordless Driver Drill

Capacity
Steel: 13mm (1/2")
Wood: 27mm (1 1/8")

No load speed (rpm)
Hi: 0-1,400
Lo: 0-400

Max. fastening torque
Hard / Soft: 41 / 25N·m

Dimensions (L x W x H)
186 x 70 x 214mm
(7 3/8" x 3 1/8" x 8 5/8")

Net weight
1.6kg (3.5lbs)

Voltage
14.4V

Model BTD130RFE


14.4V
CB-440

Cordless Impact Driver

Capacity
Machine screw: M4-M6 (5/16" - 3/8")
Standard bolt: M5-M14 (3/16" - 9/16")
High tensile bolt: M5-M12 (3/16" - 1/2")
Case thread in depth: 22-125mm (7/8" - 4 7/8")

Impacts per minute (ipm)
0-3,200

No load speed (rpm)
0-2,400

Max. fastening torque
140N·m (1,020in·lb)

Dimensions (L x W x H)
146x50mm (5 3/4"x 1 9/16")

Net weight
1.4kg (3.1lb)

Voltage
14.4V

Model BTW250RFE


14.4V
CB-440

12.7mm (1/2") Cordless Impact Wrench

Capacity
Standard bolt: M10-M16 (3/8"-5/8")
High tensile bolt: M10-M14 (3/8"-9/16")

Impacts per minute (ipm)
0-3,200

No load speed (rpm)
0-2,200

Max. fastening torque
230N·m (2,040in·lb)

Dimensions (L x W x H)
165 x 79 x 234mm
(6 1/2" x 3 1/8" x 9 1/4")

Net weight
1.8kg (3.9lbs)

Voltage
14.4V

Model BTW152RFE


14.4V
CB-440

12.7mm (1/2") Cordless Impact Wrench

Capacity
Standard bolt: M6-M16 (5/16"-5/8")
High tensile bolt: M6-M14 (5/16"-1/2")
Square drive: 12.7mm (1/2")

Impacts per minute (ipm)
0-3,200

No load speed (rpm)
0-2,400

Max. fastening torque
185N·m (1,450in·lb)

Dimensions (L x W x H)
150 x 79 x 234mm
(5 7/8" x 3 1/8" x 9 1/4")

Net weight
1.6kg (3.5lbs)

Voltage
14.4V

Cordless Tools
Lithium-Ion
Cutting/Piercing
Impact
Outdoor
Cutting
Trimming/Pruning
Sawing
Planing/Routering
Outdoor
Dust
SPP Series
Power Tools

BRUSH CUTTER

4 STROKE MADE IN JAPAN

ลดมลภาวะ เป็นมิตรกับสิ่งแวดล้อม

เครื่องตัดหญ้า 4 จังหวะ (คัตเตอร์)

Specification EBH340U

Model	EBH340U (U handle)
ขนาด	1765 x 615 x 425 มม.
น้ำหนัก (รวมแบตเตอรี่)	7.5 กก.
ความสูง (ไม่พับ)	0.65 เมตร
กำลังเครื่องยนต์	33.5 HP / 4 Stroke
ประสิทธิภาพเครื่องยนต์	1.6 ลิตร
คาร์บูเรเตอร์ (Diaphragm-carburetor)	WALSRO VVJ
สวิตช์	NGK CM6A
น้ำมัน	SAE 10W-30 oil API Classification Class

อุปกรณ์มาตรฐาน



จุดจับ/ปรับขนาดใหญ่ เบื้องหน้า

น้ำมันขนาด 28 ลิตร, ระบายความร้อนด้วยลม

แผ่นป้องกันมือ เบื้องหน้า




สวิตช์ปรับความเร็วรอบเครื่องยนต์

ชุดควบคุมความเร็วรอบเครื่องยนต์

เครื่องยนต์ขนาด 33.5 HP 4 จังหวะ

มีปุ่มล็อกสำหรับปรับความยาวของสายตัดหญ้า

รุ่น EBH340U



เมื่อถูก กระแสลม หรือไฟไหม้ จะมีการแจ้งเตือนทันที กรุณาอ่านคู่มือการใช้งาน



Pushrod size: Cam-follower

เครื่องยนต์ 4 จังหวะ 33.5 HP

ชุดตัดหญ้าแบบตัดหญ้า

สินค้าแนะนำ

เครื่องตัดหญ้าแบบเครื่องยนต์ (2 จังหวะ)



รุ่น HTR4900 21cc 490mm (19-1/4")

SPARE BLADE upper P NO. 3035220000 lower P NO. 3035220000



รุ่น HTR5600 24.5cc 560mm (22")

SPARE BLADE upper P NO. 6018505400 lower P NO. 6018505500



รุ่น HTR7610 24.5cc 750mm (29.5")

SPARE BLADE upper P NO. 6018505200 lower P NO. 6018505301

	High Volt CB No.	Part No.	MAKITA MODEL	MAKTEC MODEL
Carbon Brush	CB-1	181019-9	903	
	CB-51A	A-81181	1902, 4300BA, 4300BV, 6013B, 6016, 6300-4, 6300NB, 8419B, N3701	
	CB-55A	A-81197	8416	
	CB-64A	A-81206 (useful) B-80195 (useful)	4327, 4329, 6010B, 6411, 6412, 6700N, 6802BV, 906, B03700, B04510, B04540, GV6010, MUH353G, MUH353R	MT650, MT921
	CB-65A	A-81309	6905B, 906H, JS1600	
	CB-70A	A-81212	6501	
	CB-85A	A-88870	HP1630, HP1630KSP	MT400, MT600, MT603, MT651, MT811, MT813
	CB-100A	A-81228 (useful) B-80092 (useful)	1100, 1600, 4014N, 4014NV, 5600NB, 5800NB, 6906, 9005N, 9006N, 9045B, 9045N, 9207SPB, 9218PB, 9218PBL, 9218SB, 9924DB, JN3200, JS3200, PC1100, PC5000C, PC5001C	
	CB-106A	A-81290	6301, 6401, 8420V	
	CB-113	191904-8	HK0500	
	CB-132	191972-1	KP0810K, KP0810CK	
	CB-153A	A-81240 (useful) B-80117 (useful)	1804N, 1806N, 2012NB, 2416S, 2702, 2703, 3600H, 3612BR, 4107R, 5007NF, 5008MG, 5103N, 5201N, 5402, 9105, 9401, 9402, 9607NB, GA7001, GC5000, LS1040, LS1212, LS1440, N5900B, TW1000	MT940
	CB-165	191936-5	407	
	CB-203A	A-81321 (useful) B-80139 (useful)	2414B, 3612, 3612C, LC1230	MT240, MT360
	CB-251A	A-81343	4100NB	
	CB-303A	A-81664 B-80151 (useful)	2107F, 4100NH, 4131, 4140, 5606B, 5906B-C, 9015B, 9016B, 9227C, 9403, GA5010, GA5020, GA6010, GA6020, JR3050T, JR3070CT, UB1100, UB1101, UT1305, UT2204	MT110X, MT410, MT560, MT580
	CB-325	194074-2	9553B, 9553BX, 9556HN, 9556HP, 9556NB, GD0600, GD0601, GD0900, HR2230, HR2460F, HR2470, HR2470FT, HR2810, HR2811F, HR2811FT	
	CB-327A	A-81692 (useful) B-80204 (useful)	HM1100, HM1100C, HR3000C	
	CB-411A	A-88537 (useful) B-80167 (useful)	3709, 6951, 6952, 9031, 9500NB, 9533, 9533B, 9533BL, 9533L, 9910, JN1601, TW0200, TW0350	MT190, MT370, MT910, MT954, MT958, MT959, MT960
	CB-415A	A-81278 (useful) B-80173 (useful)	6904VH, 6905H, NHP1300S, NHP1320S	
	CB-419A	A-81284 (useful) B-80086 (useful)	4350T, 4350CT, 6821, B04555, B04556, B04557, B04565, B04901, DA3010, DP4010, HP1230, HP2050, HP2051, HR1830	MT920, MT922
	CB-430	191971-3	BGA402RFE	
	CB-440	194427-5	BDF440RFE, BDF450RFE, BTD130FRFE, BTD140RFE, BTW152RFE, BTW250RFE, BTW251RFE	
CB-441	194435-6	BHR202RFE, BHR241RFE, BJR181RFE, BTW450RFE		
CB-459/460	194723-1	GA4030		
Auto Cut-out Carbon Brush	CB-105A	A-81234 (useful) B-80101 (useful)	HM0810T, HR2010	
	CB-155A	A-81256 (useful) B-80123 (useful)	HM1201, HM1202C, HM1400	MT430
	CB-171	194412-8	HR4501C, HR4511C, HR5211C	
	CB-204A	A-81337 (useful) B-80145 (useful)	9077, 9617, GA7020, GA7030, GA9020, GA9030, HM1306, HM1500, HM1801, HM1810	MT900, MT901
	CB-318	191978-9	GD0800C, GD0810C, SG1250	
CB-350	194160-9	HK1820, HR3200C, HR3210C, HR3530, HR4011C, HR4030C		

Model CR30

200W motor


Non Automatic Shallow Well Pump (Self-Priming)

Motor	200W
Phase	230V
Pipe dia.	
Suction	25mm (1")
Delivery	25mm (1")
Dimensions (W x D x H)	231 x 252 x 280mm
Capacity	28l/min.
Total head	27m
Gross weight	18kg

Model CR38A

400W motor


Non Automatic Shallow Well Pump (Self-Priming)

Motor	400W
Phase	230V
Pipe dia.	
Suction	32mm (1-1/4")
Delivery	32mm (1-1/4")
Dimensions (W x D x H)	265 x 300 x 320mm
Capacity	40l/min.
Total head	37m
Gross weight	27kg

Model MPN125

125W motor


Non Automatic Shallow Well Pump (Self-Priming)

Motor	125W
Phase	230V
Pipe dia.	
Suction	20mm (3/4")
Delivery	20mm (3/4")
Dimensions (W x D x H)	206 x 282 x 200mm
Capacity	22l/min.
Total head	20m
Gross weight	11kg

Model MPN150

150W motor


Non Automatic Shallow Well Pump (Self-Priming)

Motor	150W
Phase	230V
Pipe dia.	
Suction	25mm (1")
Delivery	25mm (1")
Dimensions (W x D x H)	212 x 232 x 200mm
Capacity	27l/min.
Total head	21m
Gross weight	12kg

Model MPN250

250W motor


Non Automatic Shallow Well Pump (Self-Priming)

Motor	250W
Phase	230V
Pipe dia.	
Suction	32mm (1-1/4")
Delivery	32mm (1-1/4")
Dimensions (W x D x H)	218 x 247 x 267mm
Capacity	38l/min.
Total head	30m
Gross weight	18kg

Model 32CSH50B

750W motor


Centrifugal Pump CT Series (Non Automatic)

Motor	750W
Phase	230V
Pipe dia.	
Suction	32mm (1-1/4")
Delivery	32mm (1-1/4")
Dimensions (W x D x H)	242 x 354 x 314mm
Capacity	20l/min.
Total head	28m
Gross weight	30kg

Model MPA150

150W motor


Automatic Shallow Well Pump (Self-Priming)

Motor	150W
Phase	230V
Pipe dia.	
Suction	20mm (3/4")
Delivery	20mm (3/4")
Dimensions (dia.)	360 x 476mm
Capacity	21l/min.
Total head	12m
Gross weight	18kg

Model MPA250

250W motor


Automatic Shallow Well Pump (Self-Priming)

Motor	250W
Phase	230V
Pipe dia.	
Suction	25mm (1")
Delivery	25mm (1")
Dimensions (dia.)	360 x 550mm
Capacity	37l/min.
Total head	13m
Gross weight	26kg

Model WSSU250F

250W motor


Automatic Shallow Well Pump (Self-Priming)

Motor	250W
Phase	230V
Pipe dia.	
Suction	25mm (1")
Delivery	25mm (1")
Dimensions (W x D x H)	384 x 356 x 340mm
Capacity	37l/min.
Total head	12m
Gross weight	23kg

Model WP101A

750W motor


Non Automatic Shallow Well Pump (Self-Priming)

Motor	750W
Phase	380V
Pipe dia.	
Suction	40mm (1-9/16")
Delivery	40mm (1-9/16")
Dimensions (W x D x H)	334 x 355 x 360mm
Capacity	84l/min.
Total head	37m
Gross weight	41kg

Model WP201B

1500W motor


Non Automatic Shallow Well Pump (Self-Priming)



Motor	1500W
Phase	380V
Pipe dia.	
Suction	50mm (2")
Delivery	50mm (2")
Dimensions (W x D x H)	389 x 373 x 385mm
Capacity	140l/min.
Total head	42m
Gross weight	62kg

Model JPS300F

300W motor


Automatic Deep Well Pump (Jet-Pump)

Motor	300W
Phase	230V
Pipe dia.	
Suction	32mm (1-1/4")
Delivery	25mm (1")
Dimensions (W x D x H)	466 x 425 x 355mm
Suction head max.	20m
Capacity	16l/min.
Total head	28m
Gross weight	32kg

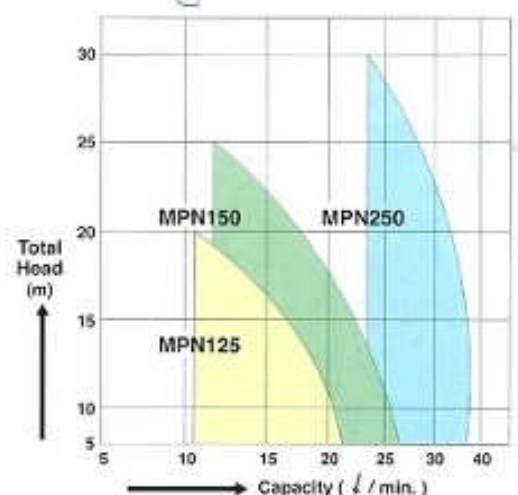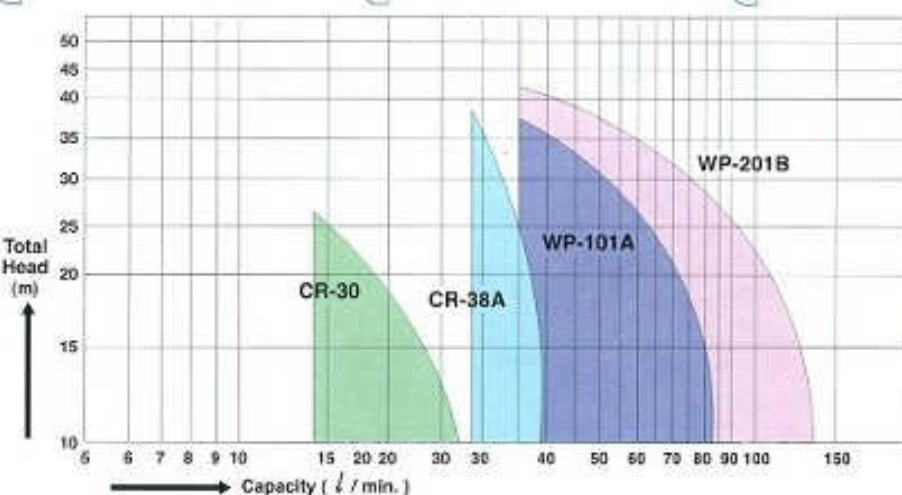

Model 25CT502

200W motor


Centrifugal Pump CT Series (Non Automatic)

Motor	200W
Phase	380V
Pipe dia.	
Suction	25mm (1")
Delivery	25mm (1")
Dimensions (W x D x H)	258 x 255 x 234mm
Capacity	90l/min.
Total head	15m
Gross weight	14kg

Model 40CT504

400W motor


Centrifugal Pump CT Series (Non Automatic)

Motor	400W
Phase	380V
Pipe dia.	
Suction	40mm (1-9/16")
Delivery	40mm (1-9/16")
Dimensions (W x D x H)	242 x 331 x 244mm
Capacity	200l/min.
Total head	17m
Gross weight	18kg

Model 40CT508

750W motor


Centrifugal Pump CT Series (Non Automatic)

Motor	750W
Phase	380V
Pipe dia.	
Suction	40mm (1-9/16")
Delivery	40mm (1-9/16")
Dimensions (W x D x H)	275 x 342 x 273mm
Capacity	220l/min.
Total head	22m
Gross weight	32kg

Model 50CT515

Centrifugal Pump CT Series (Non Automatic)

Motor	1.500W
Phase	395V
Pipe dia.	
Suction	50mm (2")
Delivery	50mm (2")
Dimensions (W x D x H)	339 x 403 x 385mm
Capacity	350l/min.
Total head	22m
Gross weight	41kg

Model 65CT522

Centrifugal Pump CT Series (Non Automatic)

750W Motor	2.2kW
Phase	380V
Pipe dia.	
Suction	65mm (2-1/2")
Delivery	65mm (2-1/2")
Dimensions (W x D x H)	330 x 514 x 310mm
Capacity	540l/min.
Total head	22m
Gross weight	58kg

Model JPS300 / JPS300N

300W motor


Automatic Deep Well Pump (Jet-Pump)

Motor	300W
Phase	220V
Pipe dia.	
Suction	32mm (1-1/4")
Delivery	25mm (1")
Dimensions (W x D x H)	400 x 421 x 355mm
Suction head max	70m
Capacity	160l/min.
Total head	36m
Gross weight	32kg

JPS300N Non Automatic

Model JPS404 / JPS404N

400W motor


Automatic Deep Well Pump (Jet-Pump)

Motor	400W
Phase	220V
Pipe dia.	
Suction	32mm (1-1/4")
Delivery	25mm (1")
Dimensions (W x D x H)	374 x 371 x 352mm
Suction head max	20m
Capacity	210l/min.
Total head	29m
Gross weight	33kg

JPS404N Non Automatic

Model JQ5600

600W motor


Automatic Deep Well Pump (Jet-Pump)

Motor	600W
Phase	220V
Pipe dia.	
Suction	32mm (1-1/4")
Delivery	25mm (1")
Dimensions (W x D x H)	430 x 400 x 414mm
Suction head max	32m
Capacity	360l/min.
Total head	32m
Gross weight	54kg

Model 32CTH508

750W motor





Automatic Deep Well Pump (Jet Pump)

Motor	750W
Phase	220V
Pipe dia.	
Suction	32mm (1-1/4")
Delivery	32mm (1")
Dimensions (W x D x H)	242 x 334 x 314mm
Suction head max	20m
Capacity	200l/min.
Total head	28m
Gross weight	32kg

Model 40CTH515

Centrifugal Pump CT Series (Non Automatic)

Motor	1.000W
Phase	380V
Pipe dia.	
Suction	40mm (1-9/16")
Delivery	40mm (1-9/16")
Dimensions (W x D x H)	262 x 411 x 316mm
Capacity	375l/min.
Total head	30m
Gross weight	37kg

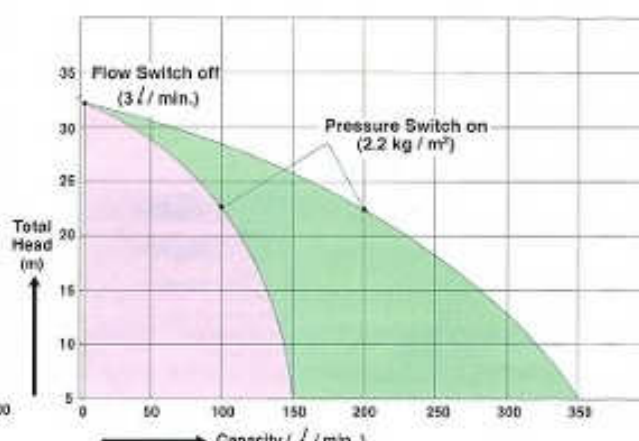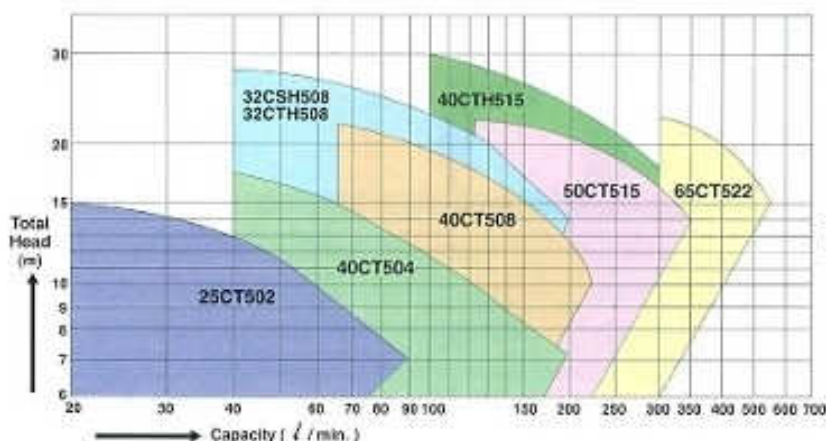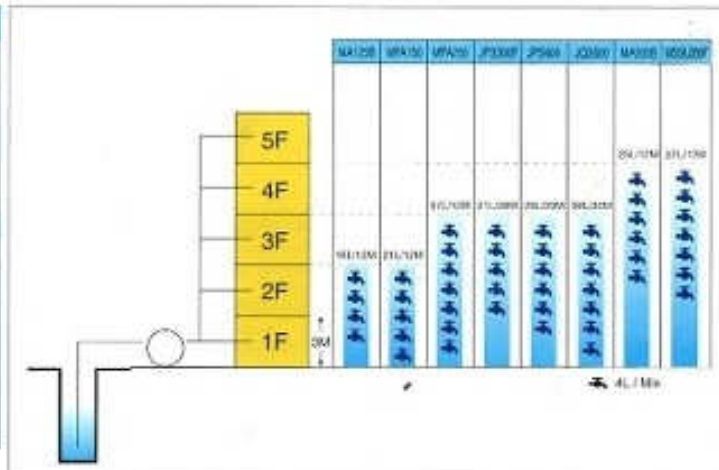

Model MT110X

800W motor
CB-303A



82mm (3-1/4") Power Planer

Continuous rating input	800W
Planing width	82mm (3-1/4")
Planing depth	1mm (1/32")
No load speed (rpm)	15,000
Overall length	290mm (11-3/8")
Net weight	2.5kg (5.5lbs)



Model MT190

800W motor
CB-411A



82mm (3-1/8") Power Planer

Continuous rating input	800W
Planing width	82mm (3-1/4")
Planing depth	1mm (1/32")
No load speed (rpm)	15,000
Overall length	290mm (11-3/8")
Net weight	2.5kg (5.5lbs)



Model MT230

1,500W motor



255mm (10") Compound Miter Saw

Continuous rating input	1,500W
Blade diameter	255mm
Capacity at 90°	75 x 130mm
Capacity at 45°	75 x 90mm
Capacity at 90°/45°	48 x 130mm
Capacity at 45°/45°	48 x 90mm
No load speed (rpm)	4,200
Net weight	14.7kg

Model MT240

2,000W motor
CB-203A



355mm (14") Portable Cut-off

Continuous rating input	2,000W
Wheel dia.	355mm (14")
Hole dia.	25.4mm (1")
No load speed (rpm)	3,800
Net weight	15.9kg (35.1lbs)



Model MT360

1,650W motor
CB-303A



12mm (1/2") Router

Continuous rating input	1,650W
Collet capacity	12mm (1/2")
No load speed (rpm)	22,000
Plunge capacity	0-60mm (0-2-3/8")
Overall length	267mm (10-1/4")
Base dia.	160mm (6-5/16")
Net weight	5.8kg (12.8lbs)



Model MT370

450W motor
CB-411A



6mm (1/4") Trimmer

Continuous rating input	450W
Collet capacity	6mm (1/4")
No load speed (rpm)	26,000
Overall length	199mm (8")
Net weight	1.7kg (3.7lbs)



Model MT400

500W motor
CB-85A



428mm (16-7/8") Blower

Continuous rating input	500W
Air volume	1.2-2.4m
No load speed (rpm)	8,000-16,000
Overall length	428mm (16-7/8")
Net weight	1.3kg (2.9lbs)



Model MT410 / MT411

1,200W motor
CB-303A + MT410



110mm (4-3/8") Cutter

Continuous rating input	1,200W : MT410 900W : MT411
Blade diameter	110mm (4-3/8")
Max. cutting capacity	32mm (1-1/4")
No load speed (rpm)	13,000 : MT410 12,000 : MT411
Overall length	226mm (8-7/8") : MT410
Net weight	2.9kg (6.4lbs) : MT410 2.7kg (5.9lbs) : MT411



Model MT430

450W motor
CB-155A
AUTO-CUT



Jig Saw

Continuous rating input	450W
Stroke per minute (spm)	0-3,100
Capacity	Wood : 55mm Mild steel plate : 6mm
Dimensions	219 x 85 x 194mm
Net weight	2.5kg



Model MT560 / MT580

1,200W motor
CB-303A



165mm (6-1/2") / 185mm (7-1/4") Circular Saw

Continuous rating input	1,200W
Blade diameter	165mm (6-1/2") / 185mm (7-1/4")
Max. cutting capacities at 90°	66mm (2-5/8") / 66mm (2-5/8")
at 45°	37mm (1-1/2") / 46mm (1-7/8")
No load speed (rpm)	4,700
Overall length	272mm (10-3/4") / 290mm (11-1/4")
Net weight	5.4kg (11.9lb) / 5.9kg (13.0lb)



Model MT600

300W motor
CB-85A



10mm (3/8") Drill

Continuous rating input	300W
Max. capacities	Steel : 10mm (3/8") Wood : 25mm (1")
No load speed (rpm)	0-2,900
Overall length	230mm (9-1/4")
Net weight	1.4kg (3.1lb)



Model MT603

450W motor
CB-85A



10mm (3/8") Drill

Continuous rating input	450W
Max. capacities	Steel : 10mm (3/8") Wood : 25mm (1")
No load speed (rpm)	0-3,000
Overall length	238mm (9")
Net weight	1.2kg (2.6lb)



Model MT650

230W motor
CB-64A



6.5mm (1/4") Drill

Continuous rating input	230W
Max. capacities	Steel : 6.5mm (1/4") Wood : 9mm (11/32")
No load speed (rpm)	4,900
Overall length	213mm (8-3/8")
Net weight	0.8kg (2.0lb)



Model MT651

230W motor
CB-85A



6.5mm (1/4") Drill

Continuous rating input	230W
Max. capacities	Steel : 6.5mm (1/4") Wood : 9mm (11/32")
No load speed (rpm)	0-4,500
Overall length	216mm (8-1/2")
Net weight	0.9kg (2.0lb)



Model MT811

450W motor
CB-85A



13mm (1/2") Hammer Drill

Continuous rating input	450W
Max. capacities	Concrete : 13mm (1/2") Steel : 13mm (1/2") Wood : 16mm (11/16")
No load speed (rpm)	0-2,800
Blows per minute	0-32,800
Overall length	272mm (10-3/4")
Net weight	1.6kg (3.5lbs)



Model MT813

710W motor
CB-85A



15mm (5/8") Hammer Drill

Continuous rating input	710W
Max. capacities	Steel : 13mm (1/2") Wood : 30 (1-3/16") Brick : 10 (5/8")
No load speed (rpm)	0-3,000
Blows per minute	0-45,000
Net weight	2.6kg (4.4lb)



Model MT910

260W motor
CB-411A



6mm (1/4") Die Grinder

Continuous rating input	260W
Capacities	Coil: 6mm or 1/4" Wheel dia.: 36mm (1-1/2")
No load speed (rpm)	25,000
Dimensions (L x W x H)	328 x 63 x 63mm (13" x 2-1/2" x 2-1/2")
Net weight	1.1kg (2.4lb)

Model MT920

160W motor
CB-415A



Finishing Sander

Continuous rating input	160W
Pad size	112 x 102mm (4-3/8" x 4")
Abrasive paper Size	140 x 114mm (5-1/2" x 4-1/2")
Orbits per min	14,000
Net weight	0.8kg (1.8lbs)

Model MT921

100W motor
CB-5AA



Finishing Sander

Continuous rating input	100W
Pad size	93 x 165mm (3-5/8" x 7-1/4")
Abrasive paper Size	93 x 228mm (3-5/8" x 9")
Orbits per min	12,000
Net weight	1.3kg (2.9lbs)

Model MT940

940W motor
CB-103A



Belt Sander

Continuous rating input	940W
Belt size	100 x 610mm W' x 24"
Belt speed	380m/min (1,250ft/min)
Net weight	6.3kg (13.9lb)

Model MT954

570W motor
CB-411A



100mm (4") Angle Grinder

Continuous rating input	570W
Max. capacities (dia.)	Depressed center wheel: 100mm (4") Wire cup brush: 75mm (3") Abrasive disc: 100mm (4") Diamond wheel: 110mm (4-3/8")
No load speed (rpm)	12,000
Overall length	266mm (10-1/2")
Spindle thread	M10 x 1.5
Net weight	1.5kg (3.3lbs)

Model MT958

710W motor
CB-411A



100mm (4") Angle Grinder

Continuous rating input	710W
Max. capacities (dia.)	Depressed center wheel: 100mm (4") Wire cup brush: 75mm (3") Abrasive disc: 100mm (4") Diamond wheel: 110mm (4-3/8")
No load speed (rpm)	11,000
Overall length	266mm (10-1/2")
Spindle thread	M10 x 1.5
Net weight	1.5kg (3.3 lbs)

Model MT959

670W motor
CB-411A



100mm (4") Angle Grinder

Continuous rating input	670W
Wheel size	Depressed center wheel: 100mm (4") Wire cup brush: 75mm (3") Abrasive disc: 100mm (4") Diamond wheel: 110mm (4-3/8")
No load speed (rpm)	12,000
Net weight	1.4kg (3.1lbs)

Model MT960

720W motor
CB-411A



100mm (4") Angle Grinder

Continuous rating input	720W
Wheel size	Diameter: 100mm (4") No load speed (rpm): 12,000
Net weight	1.4kg

Model MT900 / MT901

2,000W motor
CB-104A
AUTO-CUT



180mm (7") / 230mm (9") Disc Grinder

Continuous rating input	2,000W
Wheel size	Diameter: 180mm (7") / 230mm (9") No load speed (rpm): 6,500 / 6,000
Net weight	4.3kg

Model MT0625K / MT0625K2

9.6V
+ MT0620C
(New Battery)



10mm (3/8") Cordless Driver Drill

Max. capacities	Steel: 10mm (3/8") Wood: 21mm (13/16") Wood screws: 5.1 x 38mm (3/16" x 1-1/2")
No load speed (rpm)	H: 0-1,000 / L: 0-350
Max. fastening torque	10/18Nm (103/164kgf.cm)
Overall length	203mm (8")
Net weight	1.3kg (2.9lb)
Voltage	9.6V
Charging time	1hour

Model MT0635K / MT0635K2

12V
+ MT0630C
(New Battery)



10mm (3/8") Cordless Driver Drill

Max. capacities	Steel: 10mm (3/8") Wood: 24mm (15/16") Wood screws: 5.1 x 63mm (3/16" x 2-1/2")
No load speed (rpm)	H: 0-1,000 / L: 0-350
Max. fastening torque	14/21Nm (143/214kgf.cm)
Overall length	200mm (8")
Net weight	1.4kg (3.1lb)
Voltage	12V
Charging time	1hour

Model MT0645K / MT0645K2

14.4V
+ MT0640C
(New Battery)



10mm (3/8") Cordless Driver Drill

Max. capacities	Steel: 05-10mm (3/8") Wood: 23mm (13/16") Wood screws: 6.0 x 75mm (1/4" x 2-15/16")
No load speed (rpm)	H: 0-1,300 / L: 0-400
Max. fastening torque	15/18Nm (135/204kgf.cm)
Overall length	214mm (8-3/8")
Net weight	2.0kg (4.4lb)
Voltage	14.4V
Charging time	1hour

Model MT0655K / MT0655K2

18V
+ MT0650C
(New Battery)



13mm (1/2") Cordless Driver Drill

Max. capacities	Steel: 13mm (1/2") Wood: 28mm (1-1/8") Wood screws: 6.0 x 75mm (1/4" x 2-15/16")
No load speed (rpm)	H: 0-1,200 / L: 0-400
Max. fastening torque	18/21Nm (163/204kgf.cm)
Overall length	225mm (8-7/8")
Net weight	2.2kg (4.8lb)
Voltage	18V
Charging time	1hour

Model MT0665K / MT0675K / MT0675K2

7.2V
+ MT0670C
(New Battery)



10mm (3/8") Cordless Driver Drill

Capacities	Steel / Wood: 10mm (3/8") Screw: 4.5 x 22mm (3/16" x 3/4")
No load speed (rpm)	800
Overall length (rpm)	223
Net weight	1.1kg (2.4lb)
Voltage	7.2V
Charging time	1hour

Model MT700



2stroke Brush Cutter

Displacement	26cc
Fuel tank	600cc
Ignition system	Diaphragm type
Dry weight	5.1kg
Overall length	1735mm
Mixing ratio	25:1

คำแนะนำ

- ควรเลือกสินค้าให้เหมาะ: สมกับการใช้งาน
- ตะโหลกแข็ง: ช่วยยืดอายุการใช้งานของเครื่องให้คงทน
- ระวังสินค้าออกเลียนแบบ
- หากพบสินค้าออกเลียนแบบแจ้งมา: แส่ได้! บริษัท สำนักกฎหมายดำเนิน สมเกียรติและบุญมา จำกัด โทร 02-639-1955 ต่อ 250 หรือ 257

Cordless tools
 Li-Ion
 Drilling/Finishing
 Impact
 Drilling/Drumming
 Cutting
 Grinding/Sanding
 Sawing
 Planing/Flattening
 Outdoor
 Power Equipment
 Dust
 Extraction/Drill
 SSP Series
 Pneumatic